



A000621766

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

6/2/2016 10:33:41 AM

AS DOC #: A000621766

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 130918

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trotter

Date: May 26, 2016 License No: 40002  
PLS# 41002

North Quarter Corner of Section 19, Township 134 N, Range 30 W, 5<sup>th</sup> P.M.

On 2-16-2016 found a 1/2" iron pipe, up 0.3' in open field


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

Not to Scale

Corner Index:  
N. 0-3. 0

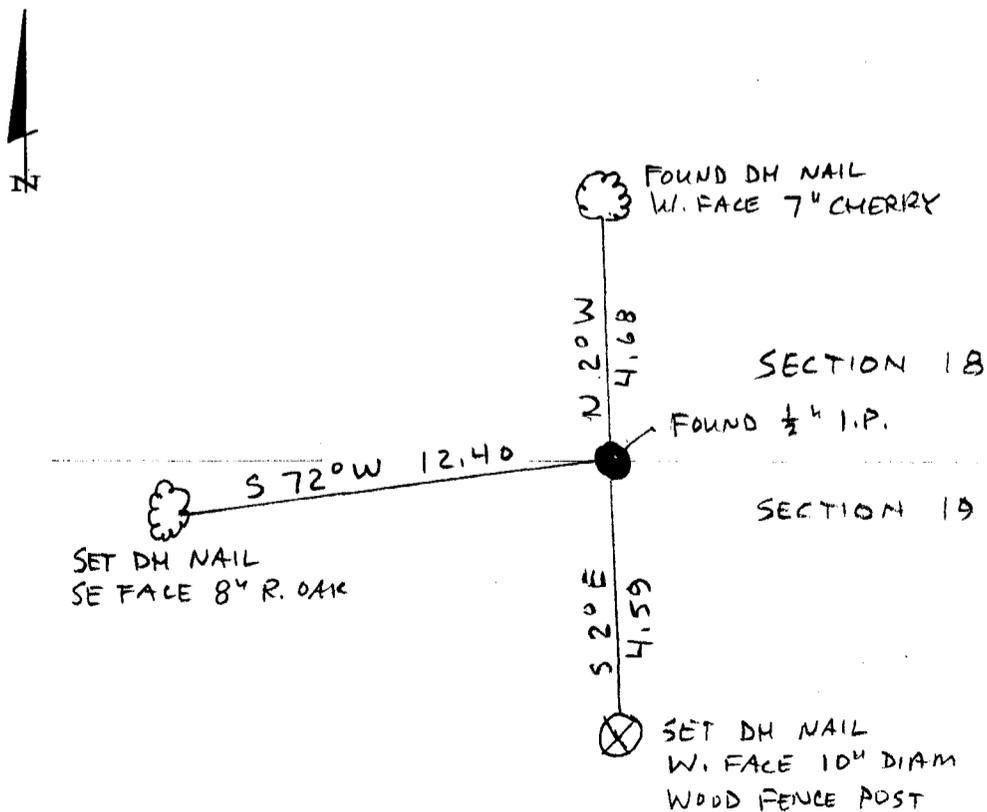



**N.0-3.0**

**Statement of Evidence**

**North Quarter corner, Section 19, Township 134 North, Range 30  
West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1868 – N. Butler, US Deputy Surveyor established this corner. A wood post was set from which the following witnesses were established:

7” Pine S 26° E      90 links  
8” Pine N 47° E      56 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1999 – CCHD/SO staff searched for and found no physical corner or ties. Located fencelines East, West and South and a field road to west. Obliterated position was computed based on the intersection of the fence line from the south with a line from the NW corner of Section 19 which parallels the field road and fence evidence to the west. Set 1/2" iron pipe w/ no cap, up 0.3' and 4' North of large fence post, and established the following witnesses:

7” Cherry      N 2° W      4.68 feet  
28” Maple      S 42° E      21.02 feet  
8” R. Oak      S 72° W      12.40 feet

Information on file in the CCHD/SO.

2015 – Patrick Trottier, PLS 41002, found the 1/2" iron pipe w/ no cap, up 0.3' and 4' North of 10" round fence post. Found the Cherry and R.Oak ties from 2000. Accepted monument as corner and established an additional witness as shown on face of this survey.

**County Coordinates (Cass County South)**

Northing      193493.93  
Easting      489779.34