



A000630644

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/10/2017 2:06:45 PM

AS DOC #: A000630644

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY KF Dep TX#: 138309

Page 1 of 2 A000630644

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Index No. E.0 - 19.0

N 1/4 Corner of Section 11, Township 136, Range 32, 5 P.M.
STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On _____ found a _____
date

left monument as found, lowered monument, removed monument (explain)

On MARCH 13, 2017 placed a NO MONUMENT FOUND OR SET NOTHING DUE TO WATER DEPTH
date

SKETCH OF REFERENCE TIES

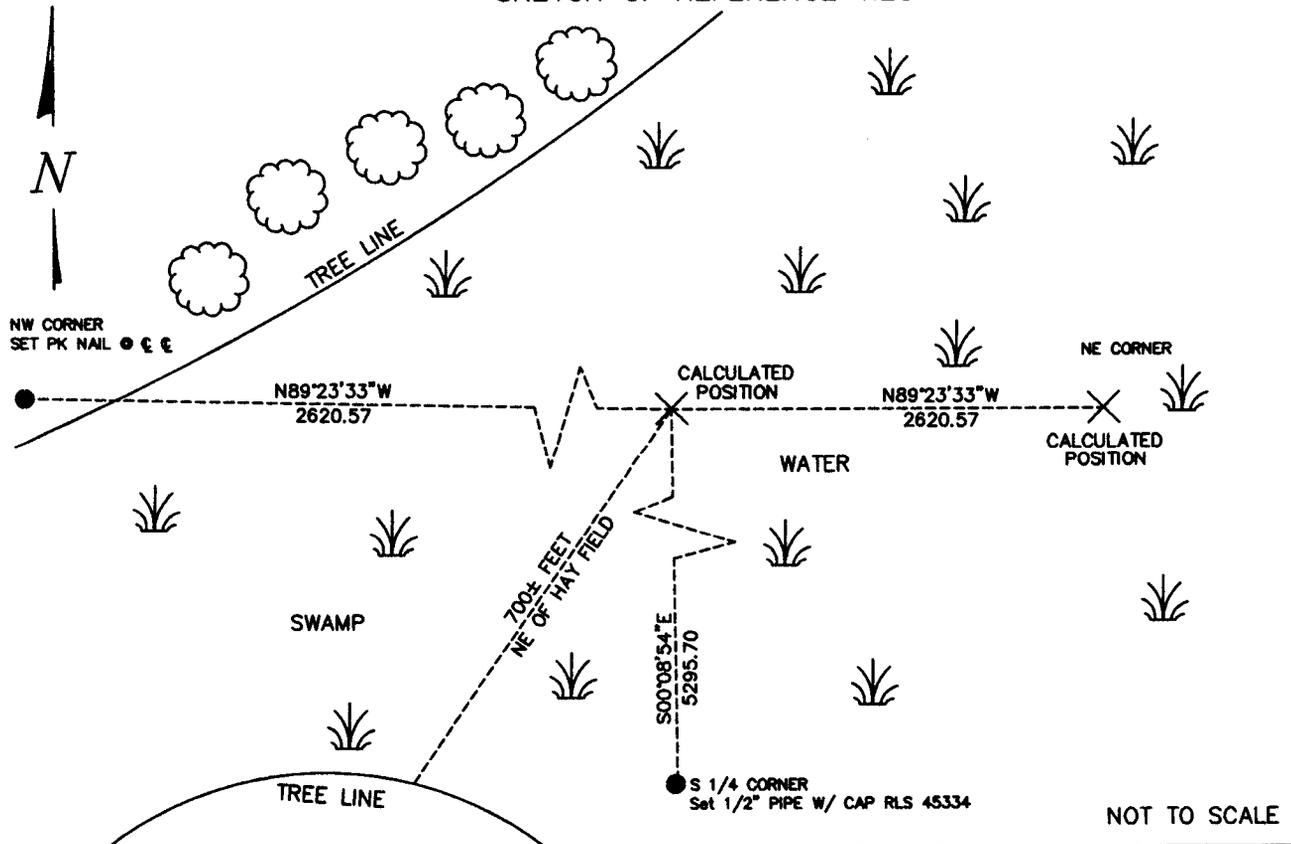

Statement of evidence relative to this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE [Signature]

DATE 3-31-2017 Registration No. 45334

Title: Land Surveyor Professional Engineer County Surveyor County Engineer



E.0 – 19.0

The North Quarter Corner of Section 11, Township 136 North, Range 32 West of the Fifth Principal Meridian, Cass County, Minnesota, was established as part of the Original Public Land Survey during 1866. The Original Public Land Survey was done by Oscar Garrison, U.S. Deputy Surveyor. The Original monumentation was a set wood post to mark this corner position with bearing tree as follows:

8" Tamarack N11°E – 13 links (8.58 feet)
6" Spruce S37°W – 19 links (12.54 feet)

Information on file in the MN Historical Society, St. Paul, MN. Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

March 5, 1919, J.A. Pomasal and E. Felton surveyed Judicial Ditch No. 7 - Lateral No.2. in Ditch Road Book – Field Book 2 - 10 pages 1-18. Staked out ditch 28 feet North and 28 feet East of the NE corner (Nothing stated found at the corner) and ran west on random line to the N ¼ corner 2610.1 feet and found the N ¼ corner 38 feet south.

Witness Corners as follows:

Reference Point 3" Birch SE – 46.8 feet
Reference Point 10" Dead Tamarack Snag W – 44.2 feet

Information on file in CCHD/SO.

On March 13, 2017 Survey Mapping Solutions, Inc. (SMS) survey crew searched for the corner and found nothing. Calculated a new position based on a lost position proportionately between NW and NE corners. The corner falls into flooded swamp/open water.

The recovered and established references for the position are shown on the face of this document. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument set in 2017 by SMS is the correct perpetuation of this corner. Witness corners are as follows:

No ties are available:

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Surveyor's Office
Cass County Engineer's Office
MN DNR, Division of Lands and Minerals, Survey Section
MN DOT District Surveys Office in Baxter

Section Corner Only Calculated - Not Set

Datum: Cass County South Coordinates
Geodetic Position NAD 83 (1996 HARN Adj.)

N = 267567.360
E = 444724.498