

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 22  
Township 138 N, Range 32 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



**A000667189**

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

12/15/2020 10:35:44 AM

AS DOC #: A000667189

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY

CASS COUNTY RECORDER

BY SF Dep TX#: 167513

■ On 9-01-2020, found a(n): NO EVIDENCE OF  
DATE CORNER OR ITS ACCESSORIES

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

■ On 9-01-2020, set a(n): 1/2" REBAR WITH  
DATE ORANGE PLASTIC CAP STAMPED  
"STANG RLS 52591"

*(reserved for recording data)*

See "Statement of Evidence" for further details (on back)

GPS I.D.: RTK/VRS Co. Proj. No.: ??

## SKETCH OF REFERENCE TIES




SKETCH NOT TO SCALE

MONUMENT MARKED:



REBAR W/ CAP

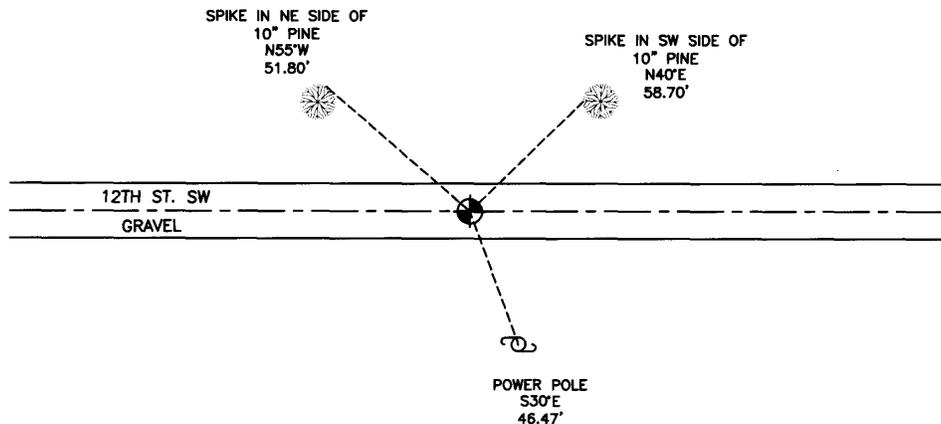

T138-R32-S22

### "SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

**NAD 83 (1996 adjustment)**

CASS SOUTH Northing: 320342.83  
Easting: 438236.84

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the state of Minnesota. I further certify that this certificate of location of government corner is correct and complete to the best of my knowledge and belief.

Michael Stang  
MICHAEL STANG

11/2/2020 License No. 52591  
DATE

- County Surveyor
- Deputy County Surveyor
- Professional Land Surveyor



N.0-15.0

NORTH QUARTER CORNER OF SECTION 22 TOWNSHIP 138 NORTH,  
RANGE 32 WEST OF THE 5<sup>TH</sup> PRINCIPAL MERIDIAN

In 1870, the original Government Surveyor (Black) set a post in place to mark the location of this Public Land Survey Corner with the following bearing trees:

12" Norway Pine, South 68.5 degrees West, 73 links

14" Norway Pine, North 49 degrees East, 5.62 links

Information on file in the MN Historical Society, St. Paul, MN and copies on file at the Cass County Highway Dept./ Surveyors Office (CCHD/SO)

In 1912, County Survey, John Curo was conducting survey work along the North line of the section. In his notes he states that the crew set an 8x8x36 inch cement post at the position of this corner. Information on file at the CCHD/SO (Book "A", pg. 408-414 and Curo Book 98, pg. 103 and 106)

In 2020, Northwestern Surveying and Engineering, Inc., a private Land Surveying and Engineering firm, was conducting cadastral surveying in this area. After research and review of historic documents and records a survey crew searched for evidence of this position.

On 9/01/2020 a crew excavated the road in search of the concrete monument and found no evidence of the corner or its accessories. The crew set a 1/2" iron rebar with RLS cap stamped "Stang 52591" using obliterated methods. The 1912 survey was utilized in positioning this corner. New ties were made as shown on the previous page.