



A000668728

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/28/2021 10:33:09 AM

AS DOC #: A000668728

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SF Dep TX#: 168663

Index No. C.O-13.0


### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 4, Township 136, Range 31, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the location shown on the sketch:

- On 11/16/2020 found TELSPAR MONMENT WITH STAMPED CAP-DOWN 1 FOOT  
DATE
- left monument as found,     lowered monument,     removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_  
DATE

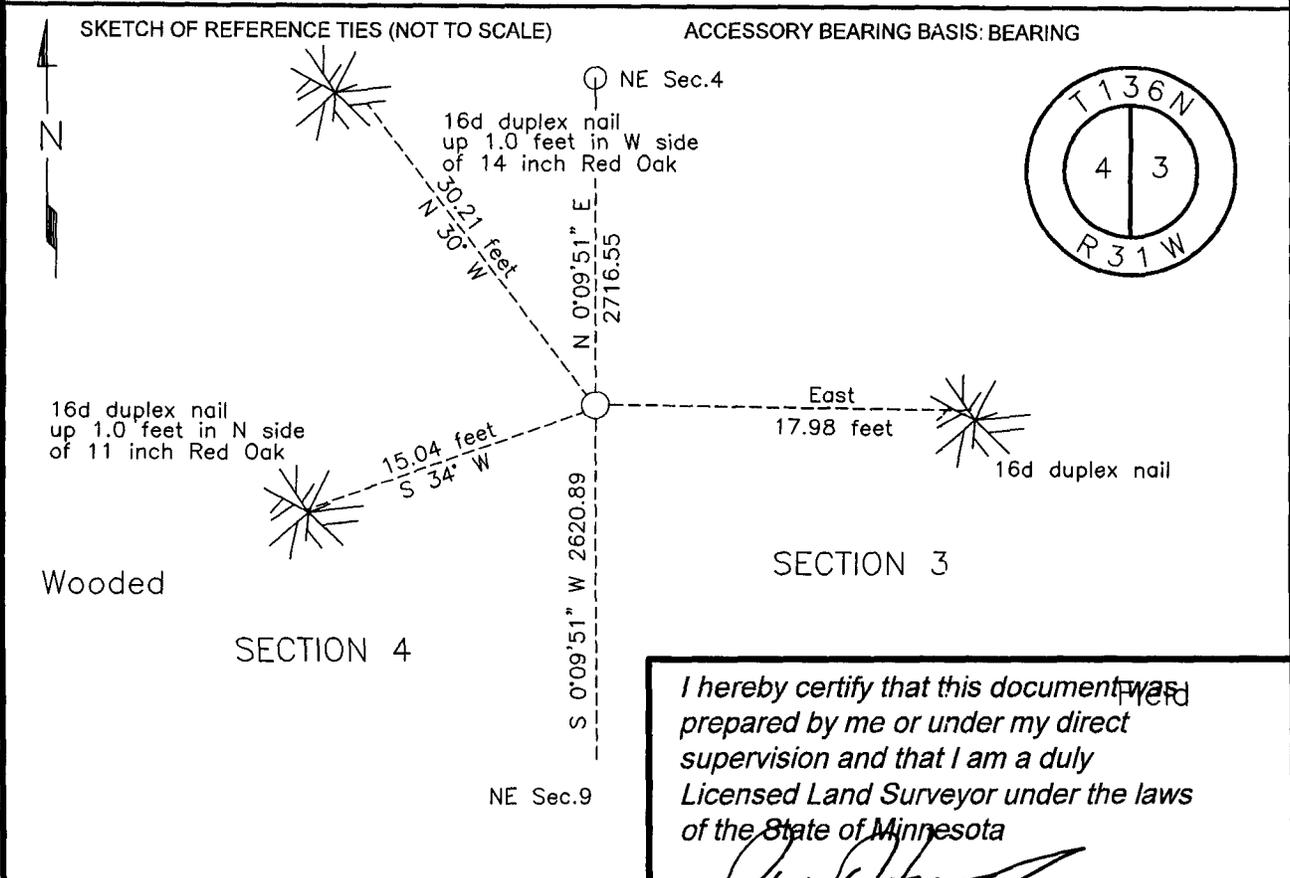

I hereby certify that this document ~~was~~  
prepared by me or under my direct  
supervision and that I am a duly  
Licensed Land Surveyor under the laws  
of the State of Minnesota

*Paul Herkenhoff*  
PAUL HERKENHOFF

Date 11/24/2020 License No. 45875

N= 270301.515    E= 470576.344  
DATUM= CASS COUNTY SOUTH  
NAD 83/96 ADJ.    US SURVEY FT.

Statement of evidence relative to this corner is on back of page.



Page 1 of 2 A000668728



T136N R31W 5th PM \* Index No. C.0-13.0

Statement of Evidence

**East Quarter corner of Section 4, Township 136 North, Range 31 West, 5th Principal Meridian.**

Sept. 1870 R.Cronk, General Land Office (GLO) Deputy Surveyor, in the notes of the subdivision of Township 136 North, Range 31 West, set a post for the original corner and referenced it as follows:  
6" Aspen      S 10°30' W      15 links ( 9.9 feet)      6" Aspen      S 42° E      10 links ( 6.6 feet)  
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).

Jan. 2003 B.Hippen and T.Anderson, CCSO technicians, notes on file in the CCSO, found no evidence of corner.

July 15 2003 B.Hippen, CCSO technician, notes on file in the CCSO, set the corner by single proportion methods between the recovered northeast corner of Section 9 and the reestablished northeast corner of Section 4 and witnessed as follows:

14" R.Oak	N 32° W	30.21 feet	12" R. Oak	East	17.98 feet
11" R.Oak	S 34° W	15.04 feet			

Nov. 2020 Lakes Area Surveying searched for all previous evidence, finding the 2003 monument in place. Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set in July of 2003 by the CCSO is the accepted location of this corner. The monument, recovered and established references for the position are shown on the face of this document.