



A000668752

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/28/2021 10:33:33 AM

AS DOC #: A000668752

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SF Dep TX#: 168663


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard SE Corner of Section 34, Township 145 N, Range 31 W, 5th P.M.
County of Cass, State of Minnesota

At the corner location shown on the sketch :

- On 06/25/2020 found 1/2" rebar with yellow plastic cap #23046 in pipeline
clearing, flush with the surface.
- left monument as found lowered monument removed monument (explain)
- On _____ set _____

SKETCH OF REFERENCE TIES (NOT TO SCALE)

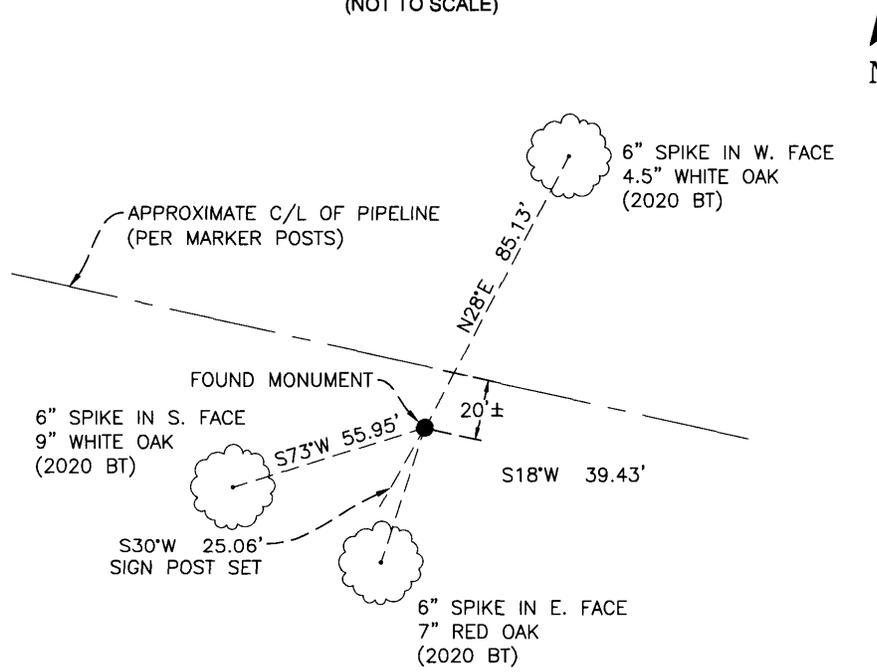

Note:
Distances shown are horizontal
Bearings shown are geodetic

Sheet 1 of 2

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the state of Minnesota.

Aaron J. Skattum
Aaron J. Skattum
MN License No. 54139

12-14-2020
Date

Corner Index No. Z.0-17.0
GCDB ID No. 500100

Cass County Coordinates
North Zone, NAD83(2011)
N: 289,685.493
E: 408,189.428





Corner Index No. Z.0-17.0

STATEMENT OF EVIDENCE

Standard Southeast Corner of Sec. 34, T.145N., R.31W., 5th P.M., Cass County, MN

- 1871 G.R. Stuntz, US General Land Office, originally established this corner while surveying the south line of this township, and set wood post to mark the corner position with the following witnesses:

Yellow pine	14"	N53'E	116 links (76.56')
Yellow pine	20"	N05'W	166 links (109.56')

Information on file at the MN Historical Society, St. Paul, MN. Copies filed with the Cass County Highway Department/Surveyor's Office (CCHD/SO).

- 1900 T.M. Fowble, U.S. Engineers, indicates original corner recovered and shown on map of Lake Winnibigoshish Reservoirs map.

- 1913 J. Curo, Cass County Surveyor, in Survey Record #237 (Book "A", Page 607, CCHD/SO Records) set a 2.5"x4' long iron pipe with cap from stub of NW GLO bearing tree and burned stump of NE GLO bearing tree. He marked new bearing trees:

Jack pine	8"	N52'E	71.10'
Norway pine	6"	N55'W	53.72'

- 1914 J. Curo, Cass County Surveyor, in Survey Record #302 (Book "B", Page 313, CCHD/SO Records) found the iron monument set previously.

- 1918 J.A. Donery, Forest Ranger, US Forest Service (MN National Forest Forms, USFS Records) found a galvanized pipe set by the county surveyor, but found no evidence of the original corner.

- 1930 H.D. Craig, US General Land Office, found a Cass County galvanized iron pipe, 2" diameter, 4" above ground with iron cap, and a pine stake 4"x4"x20" alongside, which was accepted as the section corner with the following accessories noted:

Norway pine	10"	N54'E	76.56'	1871 BT, found badly burned
Norway pine	20"	N04.5'W	109.56'	1871 BT, found badly burned
Norway pine	10"	N56.75'W	54.12'	New BT marked

Information on file at CCHD/SO

- 1934 J.A. Gjelhaug, US Forest Service (Form 874-9, USFS Records) found a 2-1/2" iron capped pipe, 1.0' above ground and noted the following bearing tree:

Norway pine	7"	N59'W	53.79'	Assumed to be 1930 GLO BT
-------------	----	-------	--------	---------------------------

- 2020 A. Skattum US Forest Service, (Corner Book 1, page 16, USFS Records) found a 1/2" rebar with yellow plastic cap marked "MILLER 23046", flush with the ground. This monument was likely set by obliterated methods, and appears (labeled as SE corner of Section 34) on a certificate of survey dated February 7, 2002 by Schellack Engineering and Land Surveying of Park Rapids, Minnesota. I accepted this monument as the best available evidence of the corner position and note the following ties:

No previous BT's were found				
Red oak	7"	S18'W	39.43'	New BT, tag only, spike in east face
White oak	9"	S73'W	55.95'	New BT, tag only, spike in SE face
White oak	5"	N28'E	85.13'	New BT, tag only, spike in west face
Signpost		S30'W	25.06'	New signpost set

USFS records cited herein are on file at the Chippewa National Forest Supervisor's Office.