

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast _____ Corner of Section 10, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/11/86 placed a cast iron monument down 6" in intersection of roads
DATE
N-S-W & trail E.

SKETCH OF REFERENCE TIES

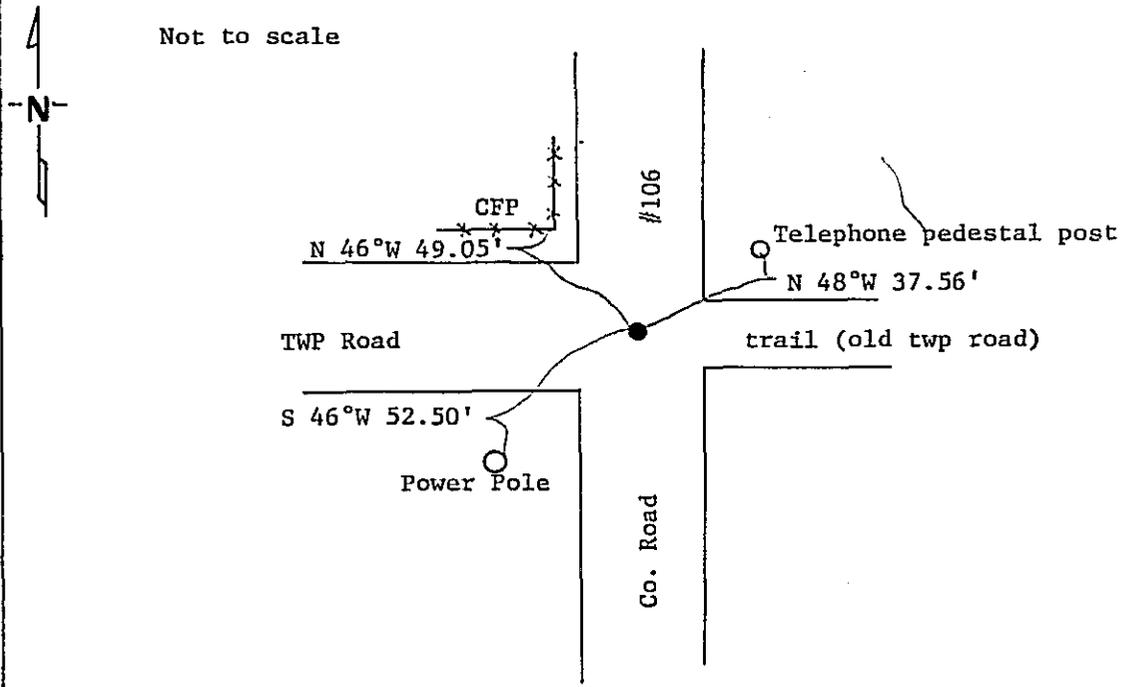

Measurements are to nail in side of bearing object
Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297495

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Henn 1-22-87
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:00 A. on the 12 day of June A.D., 19 87

Register of Deeds Cloudivine Kayler

By MS, Deputy

DOCUMENT NO. 297495

STATEMENT OF EVIDENCE Northeast Corner Section 10, T.135 N., R.32 W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 6" BL.Pine N $11\frac{1}{2}^{\circ}$ W 256 lks., 6" Tam. S 57° W 265 lks.
- 1915 County Survey Record Book "C", page 572, shows a survey by Roy Bryant. He set the corner.
- 1915 County Survey Record Book "C", page 47, shows a survey by E.B. Horst. He found the stump of the SW B.T. and the NW B.T. down and set a $1\frac{1}{2}$ x 48" I.M. The following new bearings were marked: F.P. N $84\frac{1}{2}^{\circ}$ E 20.5', F.P. N 40° W 24.7', F.P. S 42° W 45.9'
- 1921 Byron township road order shows an iron pipe set at corner.
- 1985 On Sept. 16, Terry Freeman, Cass County Survey Technician and Ken Meyer, backhoe operator dug at intersection of roads. Dug 14' N-S x 12' E-W x 3' deep. 6" class V, 2.5' fill. At 3' down, hit layer of cordoroy that covered all of digging area and more. Found nothing.
- 1986 On August 11, Terry Freeman and Dan Gordon set a cast iron monument down 6" and marked the bearings as shown on front.