

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 134 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

- On 8-16-93 found a CAST IRON MONUMENT STAMPED "CASS COUNTY SECTION CORNER"
DATE DOWN 0.6'
- left monument as found, lowered monument, removed monument (explain)
- On _____ Placed a _____
DATE _____

SKETCH OF REFERENCE TIES



NOTE:
 MONUMENT IS
 1.5' SOUTH OF CL E-W TRAIL
 34' EAST OF STEEL PIPE GATE

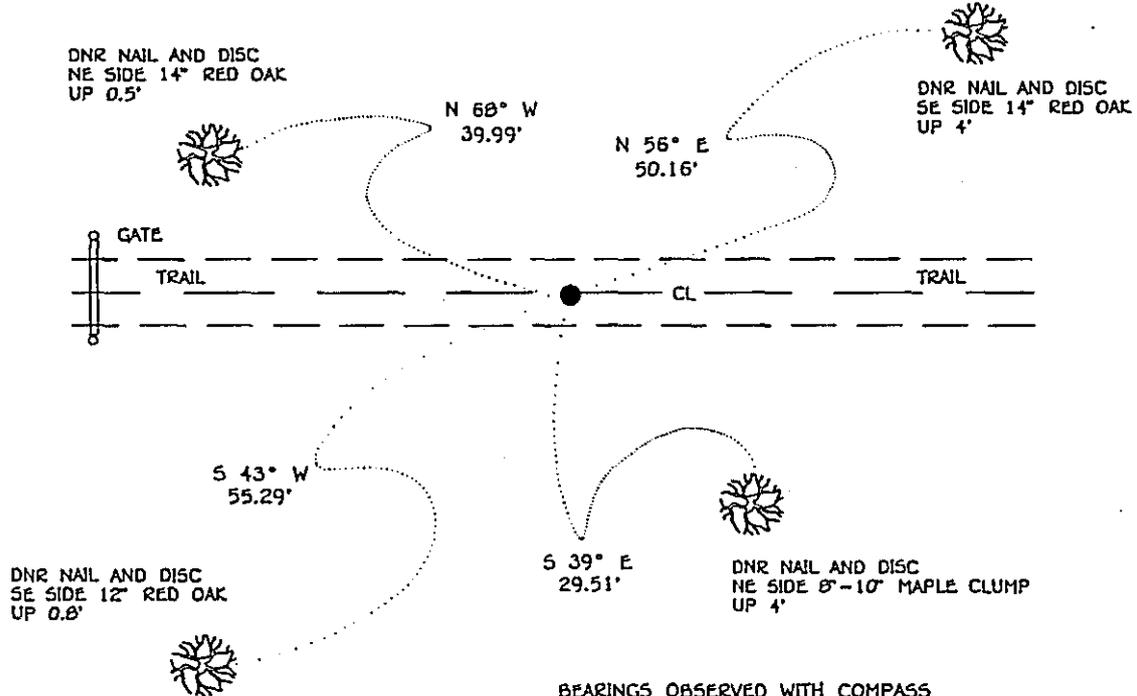

BEARINGS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

J.B.M. SEPT 1993
SFT00039.05.00.01

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

Lowell R. Pomeroy SIGNATURE 10-7-93 DATE

Registration No. 17005

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER 351908
County of CASS

I hereby certify that this document was filed in the Co. recorders office at 4:06 P.M. on the 14th day of October A.D., 1993
County Recorder Claudine Kaylan
By N.B. Deputy
DOCUMENT NO. 351908

Northeast Corner Section 7, Township 134 North, Range 29 West

The DNR Bureau of Engineering contacted the following offices for information on this corner:

MN Secretary of State
Cass County Recorder
Widseth Smith Nolting at Brainerd
Landecker & Associates at Pequot Lakes

- 1865 The U.S General Land Office notes, on file in the Secretary of State's Office show the corner is marked with a wood and marked the following bearing trees:
White Pine 18" S 52° E 67 links, Norway Pine 9" N 74° W 33 links
Norway Pine 10" N 44° E 40 links, Norway Pine 24" S 7° W 25 links
- 1956 The Cass County Land Corner Record card for this corner shows that Dean Anderson, RLS #3091, set a Cass County cast iron monument 2" below surface of centerline of trail, on December 10th. Three reference ties in trees are shown. A worksheet of Section 6, done by Anderson, shows this corner measures:
2642.30 ft. from the north quarter corner Section 7
2531.00 ft. from the east quarter corner Section 6
- 1967 A Certificate of Location of Government Corner, on file in the County Recorder's Office, states that Dean Anderson, RLS #3091, found this corner on December 10, 1956, evidenced by a iron pipe. On April 4, 1967, Anderson set a Cass County Cast Iron Monument at the location of the iron pipe. The three reference ties as shown on the County Card are shown on this certificate.
- 1979 A Certificate of Survey, by Jeffrey Miller, RLS #13336, obtained from Widseth Smith Nolting, shows an inplace iron monument at this corner.
- 1993 August 16, the DNR Bureau of Engineering conducted a search for this corner and found a cast iron monument, down 0.6 ft. Searched for, but did not find any evidence of the government bearing trees. Found all of the tie trees shown on Anderson's certificate, which agree with the found cast iron, but trees are now dead. Cast iron monument was found to measure:
2639.79 ft. from the north quarter corner Section 7
345.25 ft. from a monument at the shore of Gull Lake

Analysis of the available information led the DNR Bureau of Engineering to conclude that the cast iron monument marks the location of the corner.