

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 4

Township 138 N, Range 32 W, 5th P.M.

STATE OF MINNESOTA, COUNTY OF Cass



A000591920

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/26/2013 11:00:11 AM

AS DOC #: **A000591920**

PAGES: **2**

REC FEES: **0.00**

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000591920

On 10/15/2012, found a(n): 2" Aluminum Cap Stamped by Hubbard County on West Edge of CIM. Aluminum cap is 0.3' Below Surface, CIM is 0.5' Below Surface.

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____


See "Statement of Evidence" for further details (on back)

(reserved for recording data)

BOTH AL CAP AND CIM ARE ON CL EXTENSION SOUTH AND 3'± SOUTH OF CL EXTENSION EAST

STREET SIGN, SOUTH POST


TRAIL

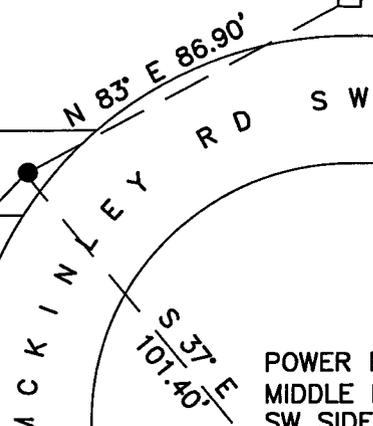

POWER POLE N&D MIDDLE POLE UP 1' SW SIDE


6" ASPEN N&D UP 1' E SIDE

WOODS

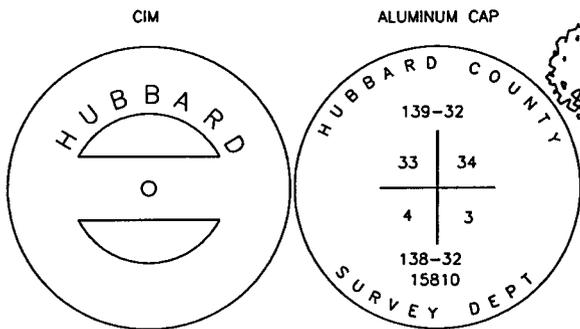

"SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 336327.69

Easting: 435717.38

NAD 83/2007 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

3-11-13
date

Jarrett M. Leas, Minnesota License No. 42619



Statement of Evidence

Northeast corner Section 4, Township 138 North, Range 32 West, Cass County Minnesota

- 1860 The Original Survey was run and a post was set to mark the corner with the following accessories: 15" Spruce N 63 E 27 links, 8" Spruce S 57 ½ E 38 links, 7" Birch N 25 W 163 links, and a 8" Spruce S 60 W 93 links.
- 1997 Minnesota Department of Transportation Right of Way Plat Number 11-19 shows a Hubbard County Cast Iron Monument marking the corner.
- 2000 The Cass County Surveyors Office found an inplace 60d spike down 0.2'.
- 2012 Kadrmas Lee & Jackson field crews searched the area and recovered a cast iron monument down 0.5' and a rebar with an aluminum cap down 0.3' stamped by Hubbard County 0.21' southwest of the cast iron monument. The cast iron monument is believed to be the correct location of the corner. The following ties were made: Sign post N 83 E 86.90', Power pole S 37 E 101.40', and a 6" Aspen S 49 W 57.61'.
- 2012 Jarrett Leas, RLS 42619, after analysis of record and survey information accepts this monument as the true location of the corner.

Contacts pertaining to this corner are as follows:

Cass County Surveyor's Office
Cass County Recorder's Office
Cass County Engineer's Office
MN Department of Natural Resources
MN Department of Transportation
Bruce Skipton RLS 17768