



A000618350

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

12/24/2015 10:45:21 AM

AS DOC #: A000618350

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY MW Dep TX#: 128046

Page 1 of 2 A000618350

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trotter

Date: 12-22-2015 License No: 41002  
PLS# 41002

North Quarter Corner of Section 19, Township 134 N, Range 31 W, 5<sup>th</sup> P.M.

On \_\_\_\_\_ found a \_\_\_\_\_

left monument as found,  lowered monument,  removed monument (explain)


On 12-15-2015 placed a 1/2" x 18" iron pipe with plastic cap stamped "RLS 41002" flush with ground

## SKETCH OF REFERENCE TIES

Not to Scale

Corner Index:

N.0-3.0

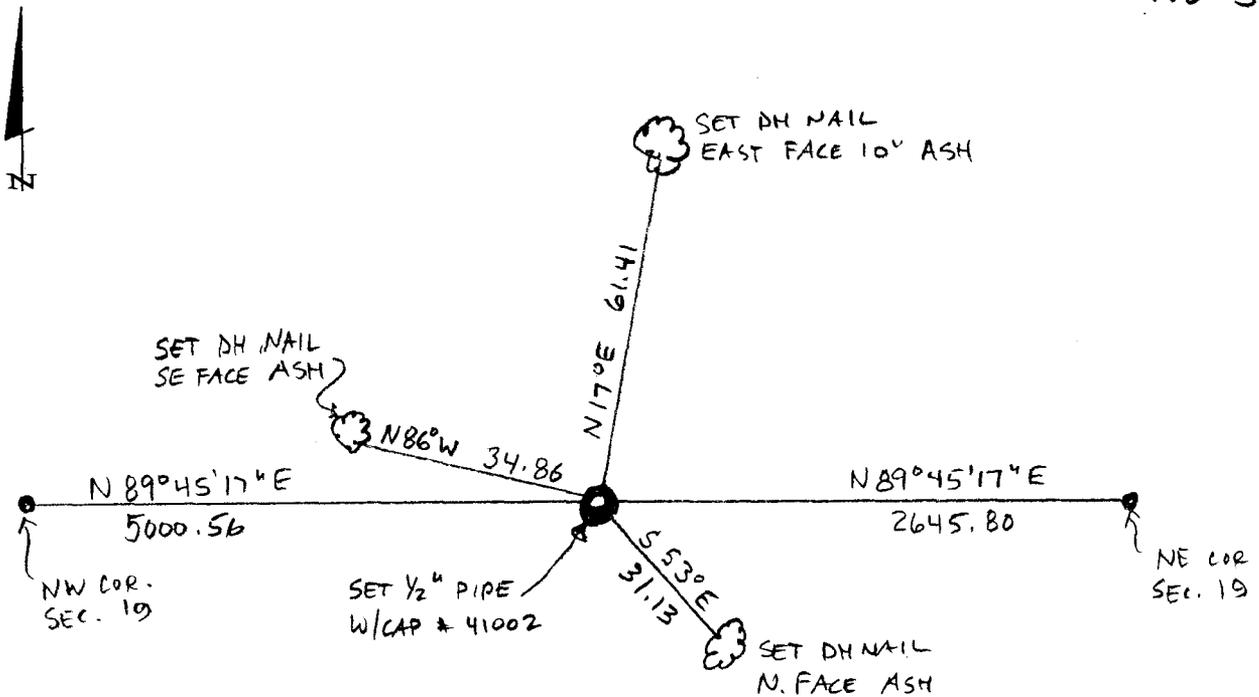

Statement of evidence for this corner position is on the back of this page



N.0-3.0

**Statement of Evidence**

**North Quarter corner, Section 19, Township 134 North, Range 31  
West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1869 – T.B. Walker, US Deputy Surveyor established this corner. A wood post was set from which the following witnesses were established:

8" Tamarack    N 18° E        8 links  
4" Tamarack    S 57° E        18 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office.

2015 – Patrick Trottier, PLS 41002, found no evidence of corner. Considered corner lost and established position by single proportion method between found and accepted NW and NE corners of said Section 19. Set ½" x 18" iron pipe with plastic cap stamped "RLS 41002" and established witnesses as shown on the face of this survey.

County Coordinates (Cass County North)

Northing        193606.28  
Easting         457834.64