

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 17, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/23/00 Placed a "T" STYLE FENCE POST, UP 1.5' IN BRUSHY BOG
DATE

SKETCH OF REFERENCE TIES

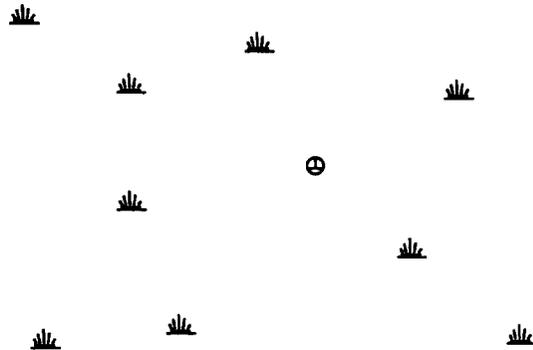

1983 CASS COUNTY SOUTH
COORDINATE SYSTEM
N= 230404.16
E= 431392.12

Statement of evidence relative to this corner location is on back of page.

APRIL 2001
FOM01868

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 4/5/01
SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER 434523
County of Cass

I hereby certify that this document was filed in the Co. Recorders Office at 2:10 P .M. on the 11th day of April A.D., 2001

County Recorder Kathryn M. Norby
By R. J. Deputy

DOCUMENT NO. 434523

Northeast Corner Section 17, Township 135 North, Range 32 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Associates of Pequot Lakes
Landecker and Associates of Walker
Central Minnesota Surveying

1866 In October, the US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Black Pine 12" S 80° W 430 links (283.8')
Tamarac 10 " N 40° W 330 links (217.8')

2000 In May, the DNR survey crew searched for the corner and bearing trees at the proportioned location between the southeast corner section 17 and the northeast corner section 8 using the road along the east line of section 8 for the east-west control. No evidence of corner was found. Set "T" style fence post up 1.5 feet in brushy bog for the corner at the computed location.

Southeast Corner Section 17 - S 01°15'33"E 5312.89'
Northeast Corner Section 8 - N 00°00'30"W 5312.90'
North Quarter Corner Section 16 - N 89°31'32"E 2657.74'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401