

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to East Quarter Corner of Section 13
 Township 145 N, Range 28 W, 5th P.M.
 STATE OF MINNESOTA, COUNTY OF CASS.

A000581292
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
06/12/2012 11:25:30 AM
AS DOC #: A000581292
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER

037288
 Tx: 4026798


On _____, found a(n): _____
DATE

left monument as found lowered monument
 removed monument (explain) raised monument
 On 4-27-2011, set a(n): 2 1/2" X 3' alum. pipe
DATE
 with a 3 1/4" alum. cap (manget in cap).

(reserved for recording data)

See "Statement of Evidence" for further details (on back)

GPS I.D.: _____ Co. Proj. No.: _____

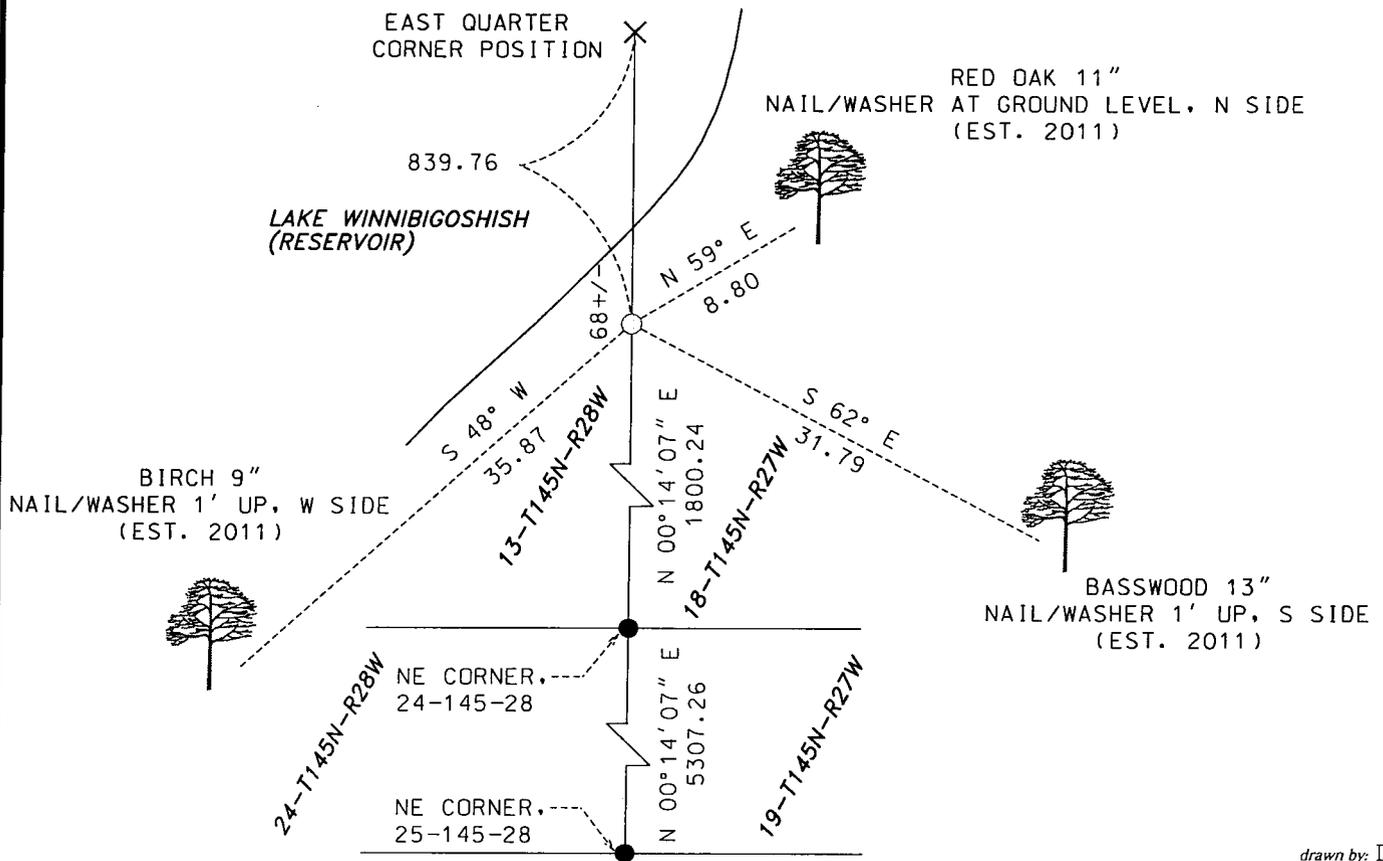

drawn by: DJW

"SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

NAD 83 Latitude (N):	<u>47° 22' 27.72716"</u>
Longitude (W):	<u>94° 09' 47.56568"</u>
CCNZC 83 Northing:	<u>308195.55</u>
Easting:	<u>513245.71</u>
NAD 83 S.P. Northing:	<u>1193979.03</u>
(Central) Easting:	<u>2646172.59</u>

Dennis J. Warner
signature
 Printed Name: Dennis J. Warner

5/10/2012
date

License No. 42656

County Surveyor Land Surveyor

STATEMENT OF EVIDENCE: Witness Corner to East Quarter Corner between Sections 13 and 18, T145N, R27-R28 West of the 5th Principal Meridian.

1873 The East Quarter Corner was established by P.H. Conger, Deputy Surveyor, in the township boundary survey. His notes indicate a post was placed at the corner between sections 13 and 18, from which:

Tamarack	8"	N62W	8 links	(5.28 feet)
Tamarack	8"	S82E	8 links	(5.28 feet)

1900 The U.S. Army Corps of Engineers Lake Winnibigoshish Reservoir map does not indicate the meander corner or a witness to the meander corner or the East Quarter Corner of Section 13 to be a known corner. Map on file with the USFS office in Cass Lake.

2011 Since the East Quarter corner position falls in the Lake Winnibigoshish Reservoir, personnel from Short Elliott Hendrickson did not search for the original monument. The East Quarter Corner was placed "at record bearing and distance" on the northerly extension of the east line of Section 13 from the northeast corner of 25-145-28 through the northeast corner of 24-145-28 and a witness corner thereto was set near the southeast shore of Lake Winnibigoshish as shown on the face of this document. Witnesses were made as shown on the face of this certificate. An analysis of the record information and field evidence supports this monument as the best evidence of the corner position.