

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

West 1/16 corner of Section 03, Township 145 N., Range 31 W., 5th P.M.  
 State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 03-21-2012 found a 1" iron pipe, with cap "Murray", flush in gravel surface.


left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

## SKETCH OF REFERENCE TIES (NOT TO SCALE)



SECTION 34,  
T146N, R31W

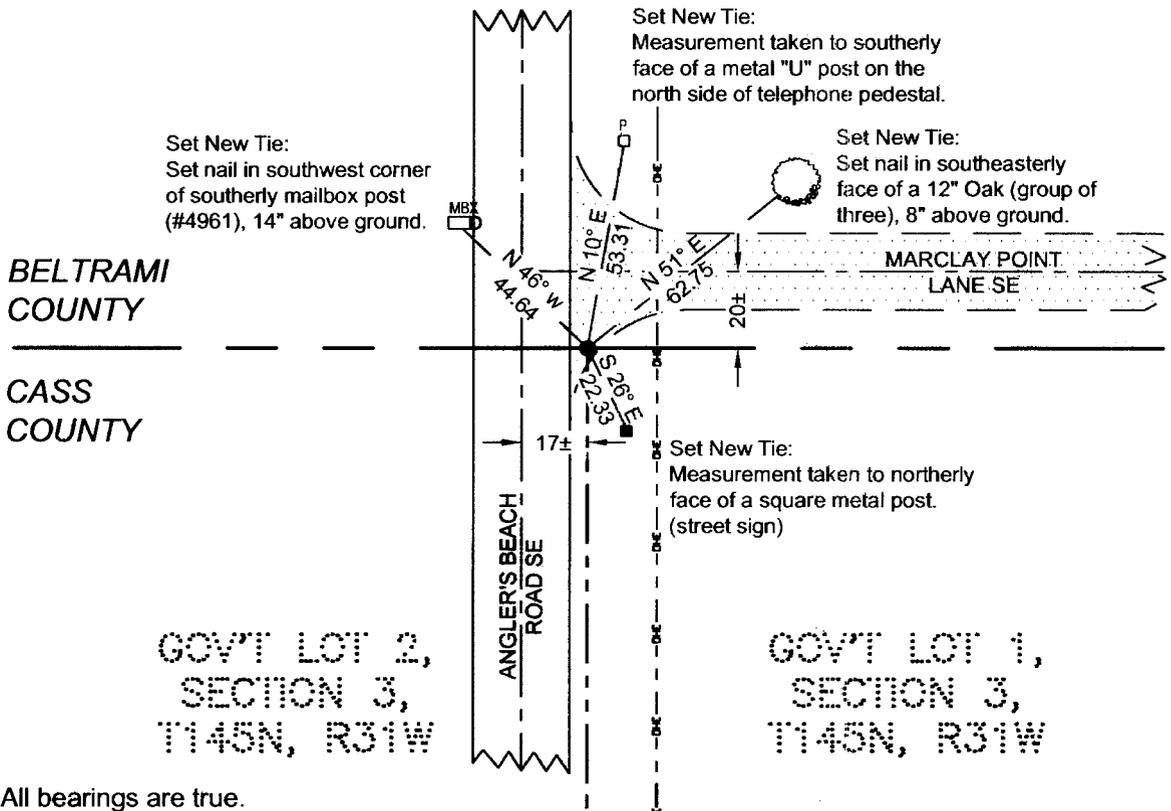

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

  
 Terry L. Freeman, Land Surveyor

Date 3/22/12 MN License No. 21367



**A000591517**

**OFFICE OF THE COUNTY RECORDER  
 CASS COUNTY, MINNESOTA  
 CERTIFIED, FILED, AND/OR  
 RECORDED ON**

4/15/2013 10:52:47 AM

AS DOC #: A000591517

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY  
 CASS COUNTY RECORDER**

BY SR \_\_\_\_\_ Dep



**STATEMENT OF EVIDENCE**

**West One-Sixteenth Corner on North line of Section 3, Township 145 North, Range 31 West of the 5th Principal Meridian.**

In 1917, C.C. Spencer, Beltrami County, drove a 1 1/4" x 20" pipe and marked two BT's as follows: a 7" B. Pine, N 75° E 73.5 feet; a 8" B. Pine, N 54° E 158.1 feet. Information in Beltrami County Record Book A, page 167 and Record Book C, page 18.

In 1922, E.B. Horst, Deputy County Surveyor found a 1/16 S. cor. Post. Information in Cass County Survey Department, Curo Book #186, page 5.

In March 2006, a Murray Surveying crew set the 1/16 corner between the MC to the west and the 1/4 corner. Notes on file in Murray Surveying Office, Bemidji, MN.

In June 2006, a Landecker and Associates survey crew found the iron monument set by Murray and the NW 1917 Spencer BT (dead). Notes currently in the Northern Engineering & Consulting Office in Walker, MN.

On March 21, 2012, a Northern Engineering & Consulting survey crew found a 1" iron pipe, w/cap "Murray", flush with gravel surface and the 1917 Spencer NW BT (20", dead). Four new ties were marked as shown on the front page of this certificate. The found iron pipe is accepted as the correct location for the Sixteenth Corner.

**Minnesota State Plane (Central Zone)**

Northing      1207366.369  
Easting        2537674.589

**County Coordinates (Cass County North)**

Northing      321631.219  
Easting        404755.886