

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 8
Township 138 N, Range 31 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000597012

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

10/3/2013 2:30:53 PM

AS DOC #: **A000597012**

PAGES: **2**

REC FEES: **0.00**

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2
A000597012



On _____, found a(n): _____
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 10/24/2012, set a(n): 5/8" X 24" Rebar With Plastic Cap
DATE
Stamped "Leas MN 42619" up 0.5'.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

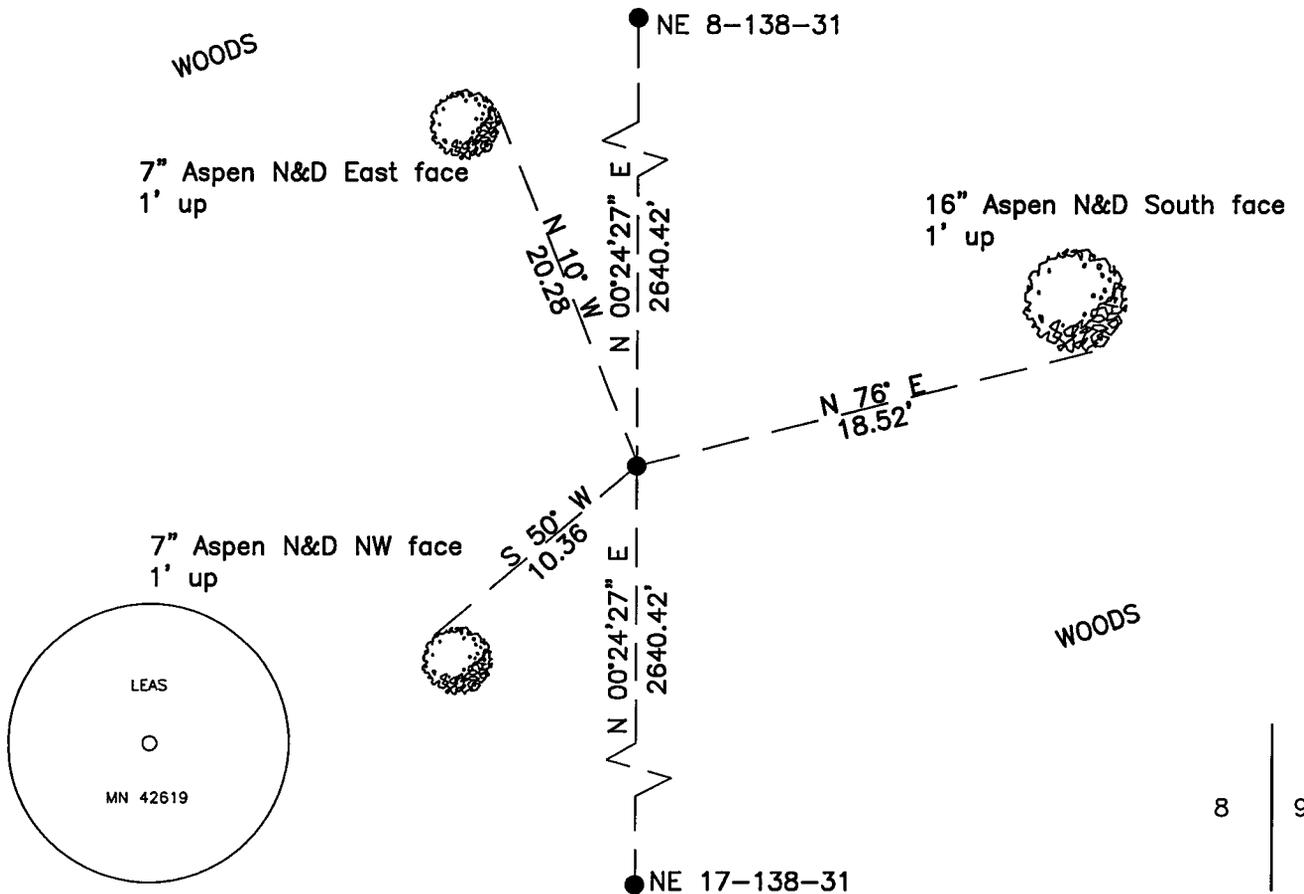

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 328473.769

Easting: 462056.132

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

2-1-13
date

Jarrett M. Leas, Minnesota License No. 42619

Statement of Evidence**East Quarter corner of Section 8, Township 138 North, Range 31 West, 5th Principal Meridian.**

- Nov. T.B.Walker, General Land Office (GLO) Deputy Surveyor set a post for the original corner in his
1870 subdivision of this township and referenced it as follows:
20" N. Pine S 58° W 25 links (16.50 feet) 26" N. Pine N 19° E 43 links (28.38 feet)
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass
County Surveyor's Office (CCSO).
- Aug 30, B.Hippen, technician, records of the CCSO, made a search at this position, and found numerous pine
2005 stumps in this area, no scribing visible.
- Oct. KLJ field crews search and find no evidence of the corner. KLJ computes a lost corner position from proportioning
2012 between the SE and NE corners of said section, splitting the overall distance of 5280.84' on a bearing of
N0°24'27"E and sets a new monument stamped "Leas MN 42619". Monument is witnessed with the ties shown on
the front of this certificate.