

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 32  
Township 145 N, Range 28 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000601877

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/24/2014 11:39:33 AM

AS DOC #: A000601877

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR            Dep

On                     , found a(n):                       
DATE



- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 03/15/2012, set a(n): 3-1/2" Brass Cap On 4' Iron Pipe,  
DATE  
Flush With Ground

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

NOTE: Norway Forest

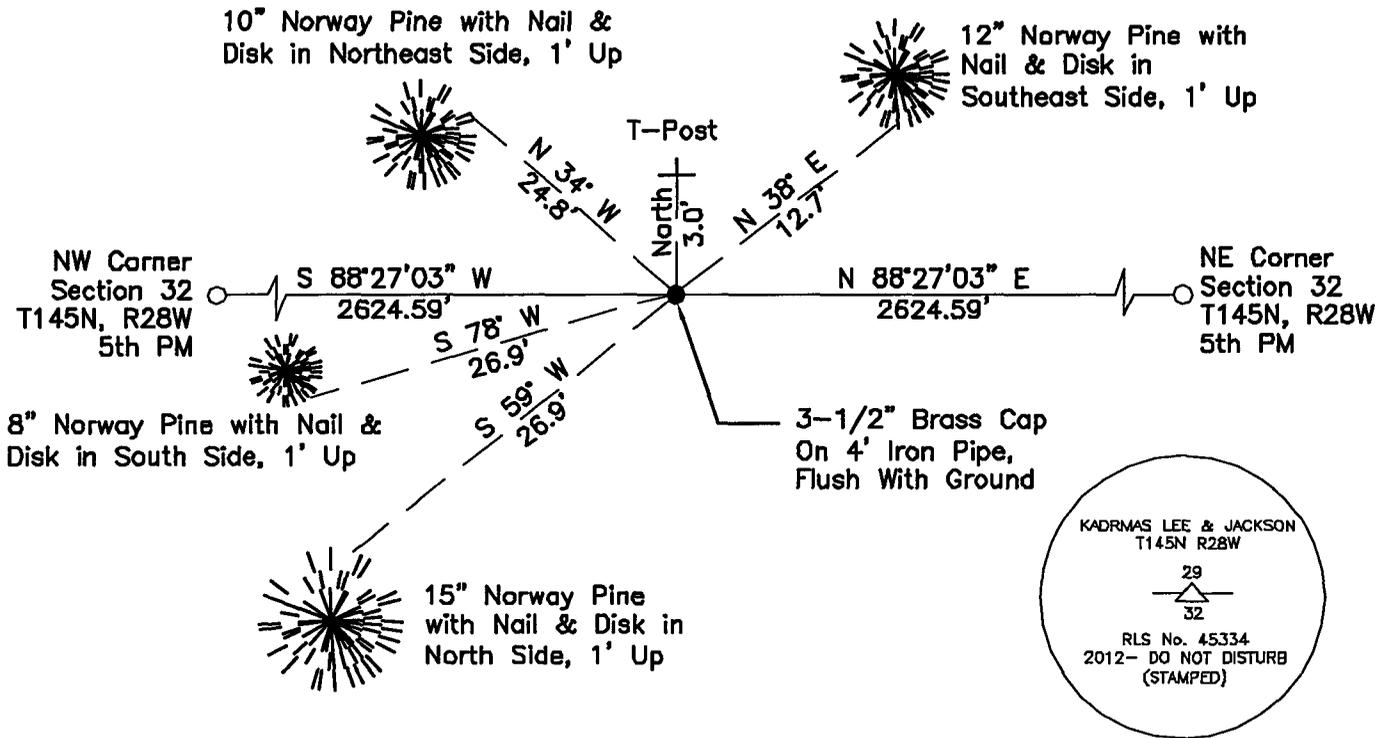

### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17203643.880  
Easting: 1328853.483

NAD 83/1996 Adjustment.  
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/24/12  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000601877



**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 29 and 32 of Township 145 North,  
Range 28 West of the 5<sup>th</sup> Principal Meridian

**1873;** This corner was originally established by P.H. Conger his field notes indicate a post set at this corner position, witnessed by:

Jack Pine 14" South 10° West, 12 links  
Norway Pine 10" North 39° West, 18 links

**1960;** Stanley Morrison, USFS personnel, 874 forms, chained to this location from Sec. corner of Sections 28-29-32-33 and found no evidence. Morrison set a metal location poster on a 4" Maple 30' West of the measured position. Information is on file with USFS office in Cass Lake.

**2010;** A KLJ survey crew found no evidence of the corner location or the metal location poster set by Morrison.

**2012;** Ross Wamre, PLS #45334, set a 3 ½" Brass Cap on a 4' pipe flush at a lost single proportionate measurement location. As measured from the Northeast and Northwest Corners of Section 32-145-28. Witnesses found and established as shown on front of this certificate.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office