

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 21, Township 144 N., Range 25 W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 1-14-1985 placed a 2 1/2" (O.D.) by 5 feet long Galvanized Iron Pipe with 3" Brass
DATE
Cap stamped as shown.

5° EAST Declination.

SKETCH OF REFERENCE TIES
NOT TO SCALE

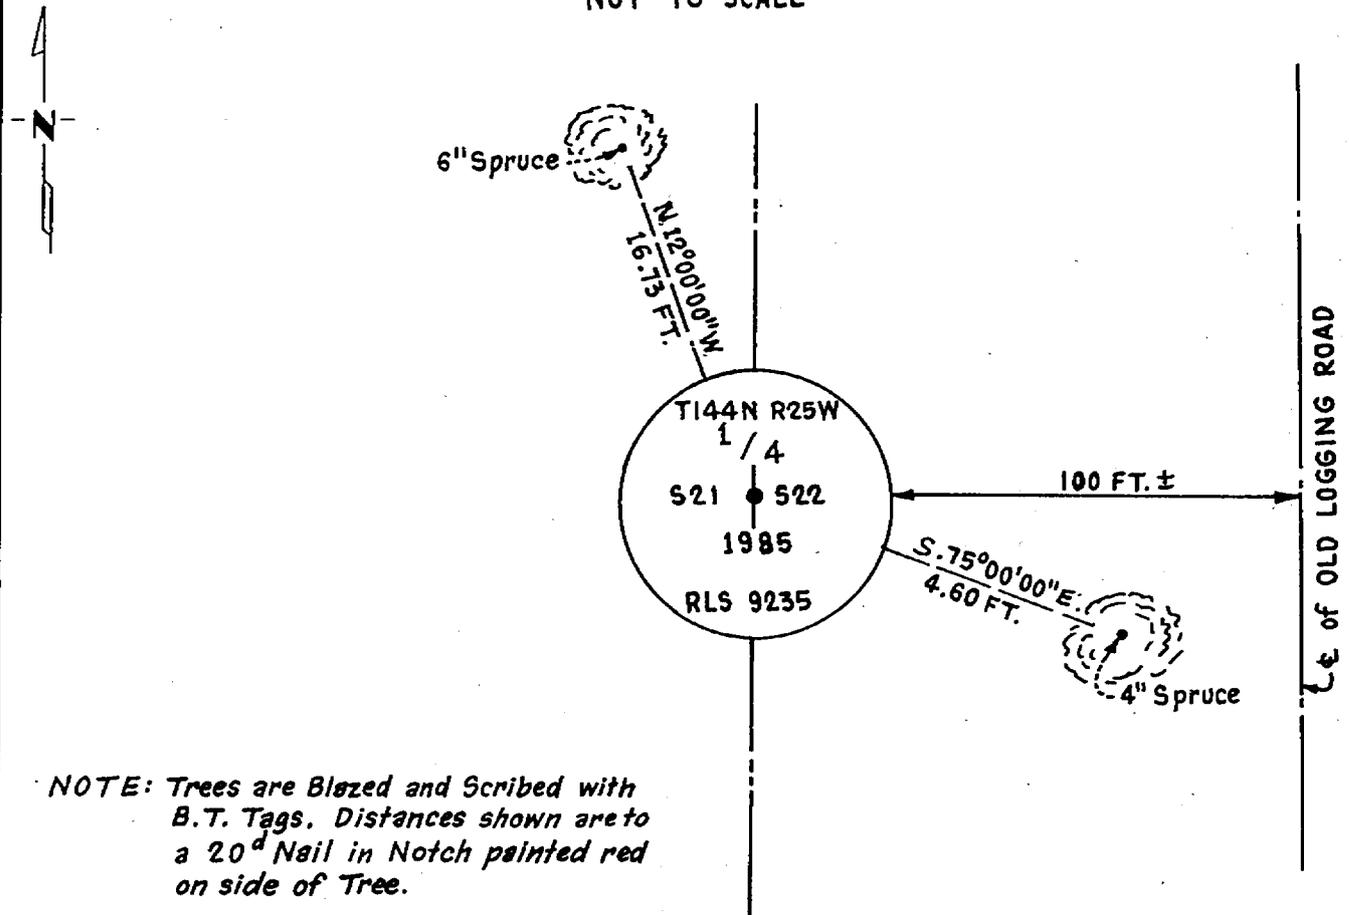

NOTE: Trees are Blazed and Scribed with B.T. Tags. Distances shown are to a 20^d Nail in Notch painted red on side of Tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE
Registration No. 9235
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281951

OFFICE OF THE COUNTY RECORDER
County of Cass
I hereby certify that this document was filed in the Co. Recorders office at 9:30 A.M. on the 15 day of May A.D., 19 85
County Recorder Claudia Kayler
By ms, Deputy
DOCUMENT NO. 281951

Statement of Evidence:

P13

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 14" Cedar that bears N83°E a distance of 27 links [17.82 feet]
A 14" Cedar that bears N87°W a distance of 35 links [23.10 feet]

On December 16, 1960, S.M. Morrison, a Forestry Aid, searched for this corner. His notes indicate a metal tag in place. He also states that he does not believe this to be G.L.O. corner because no evidence found.

On July 1, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail. This area has been logged off years ago.

On January 14, 1985, an additional search was made by Advance prior to reestablishing this corner at its "lost" position half way and on line between adjacent section corners and as shown on the sketch.