

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 17, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/4/80 found a GLO brass cap monument as set in 1919.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

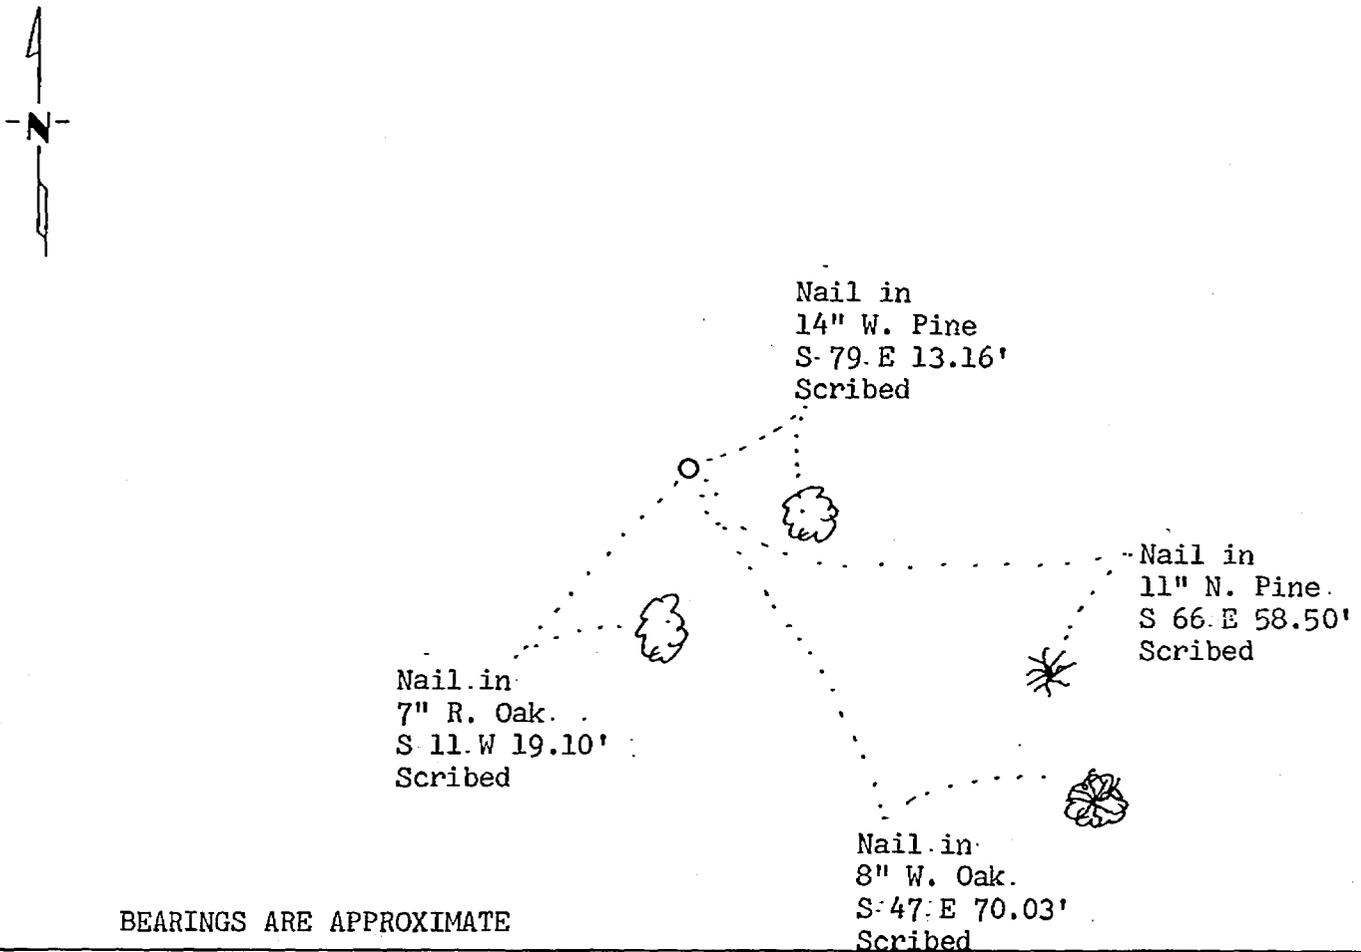

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gay H. Stevenson 9-14-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

265255
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:00 A.M. on the 29 day of Sept A.D., 1982

County Recorder Dwight K. Smith

By MS, Deputy

DOCUMENT NO. 265255

Statement of Evidence:

- 1874 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 14" N. Pine N 64 W 26 links and 10" Pine S 66 E 31 links.
- 1919 U.S. General Land Office dependent resurvey reestablished this corner from original bearing trees: 16" Pine stump N 64 W 26 links and 14" Pine stump S 66 E 31 links. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 10" W. Pine S 1 E 87 links and 6" Spruce N 25-15 W 125 links.
- 1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument in good condition up 10". The following bearing trees were found: Rotted W. Pine stump S 1 E 57.4'. No evidence found of the Spruce. Four new bearing trees were marked and are shown on this certificate.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.