

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

For the Center West One-sixteenth Corner of Section 2, Township 144 North, Range 30 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.

On April 16, 1981, to mark this corner position, we set a 2.5 inch (outside diameter) by 30 inch long aluminum pipe with a 3 inch diameter aluminum tablet, up 6 inches and stamped as shown in the sketch.

SKETCH OF REFERENCE TIES


Top of Page is NORTH

(not to scale)

decl: 5° E

 N 51° W, 163.70 feet to a nail on the side of a 17 inch diameter Norway Pine, single blazed and scribed "CW1/16 S2 BT".

N 67° W, 52.55 feet to a nail on the side of an 8 inch diameter White Spruce, single blazed and scribed "CW1/16 S2 BT"

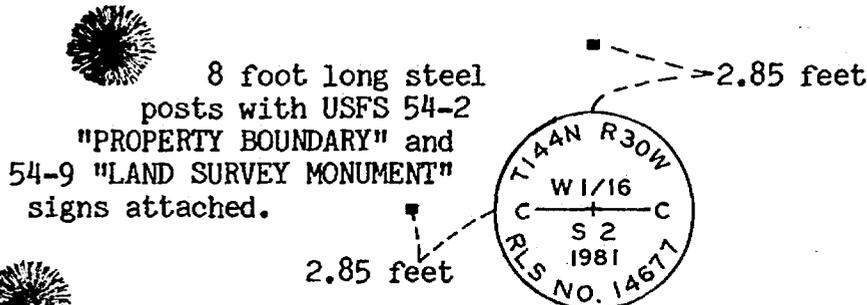

 S 84° W, 119.80 feet to a nail on the side of a 7 inch diameter Cedar, single blazed and scribed "CW1/16 S2 BT".

 S 25° E, 42.54 feet to a nail on the side of a 10 inch diameter Maple, single blazed and scribed "CW1/16 S2 BT".

All bearing trees are marked with red enamel, and a USFS 54-3 "BEARING TREE TAG".

Statement of evidence relative to this corner position is on the back.


I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.


Kenneth L. Whitehorn

Date July 2, 1986 Registration No. 14677

290150
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the office of the County Recorder this 16 day of July, 19 86, at 9:50 A.M. and assigned DOCUMENT NUMBER 290150.


Claudine Kaylor, County Recorder

STATEMENT OF EVIDENCE: For the Center West One-sixteenth Corner of Section 2,
Township 144 North, Range 30 West of the 5th Principal
Meridian

This corner position was not monumented in the original Township survey by P. H. Conger, Deputy Surveyor, under contract to the General Land Office in 1875. The notes for this survey are on file in the Office of the Secretary of State, St. Paul, Minnesota.

No intervening history has been recovered that records any monumentation or perpetuation of this corner position.

A search area for this corner position was determined using single proportionate methods based on coordinates determined from an EDM/Teodolite traverse between the West Quarter and Center Quarter Corners of said section 2. On April 16, 1981, Gary Brama and Curt Krause, USD/-Forest Service (USFS), searched this area for evidence of a corner position but nothing was found. This proportionate position was then monumented and referenced as shown on the front of this document.