

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 15, Township 134 N., Range 31 W., 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 10/31/85 found a 2" I.P. down 0.5' with base in concrete, top bent SW  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10/23/86 placed a 2"x18" telespar monument with stamped aluminum cap  
DATE  
over found 2" I.P., down ±4" under road surface.

### SKETCH OF REFERENCE TIES

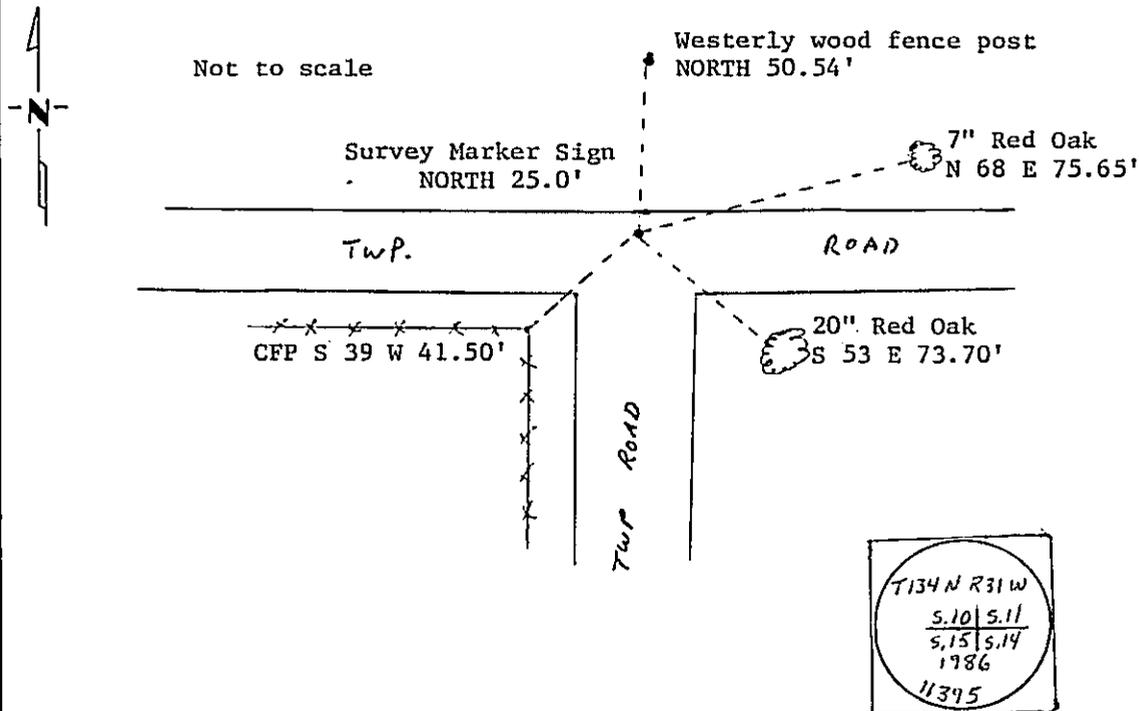

T134 N R31 W  
 5.10 | 5.11  
 5.15 | 5.14  
 1986  
 11395

Statement of evidence relative to this corner location is on back of page. 317849

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Ann 1-12-90  
SIGNATURE DATE

Registration No. 11395  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:40 P. .M. on the 12 day of January A.D., 19 90

County Recorder Clairine Keyler  
 By ms Deputy

DOCUMENT NO. 317849

Northeast Corner Section 15, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees:  
8" Aspen S65W 22 lks., 8" Aspen S43E 18 lks., 8" Aspen N40W 12 lks., 6" Aspen N52E 24 lks.
- 1985 On October 31, Terry Freeman, Cass County Survey Technician, found a 2" I.P. down 0.5' with the top bent to the southwest.