

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

MEANDER CORNER 5 ~~INDEX~~ of Section 27, Township 140 N, Range 26 W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 12/7/83 found a 1 3/4" iron pipe (up 0.8') on top north side ice ridge.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ Placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

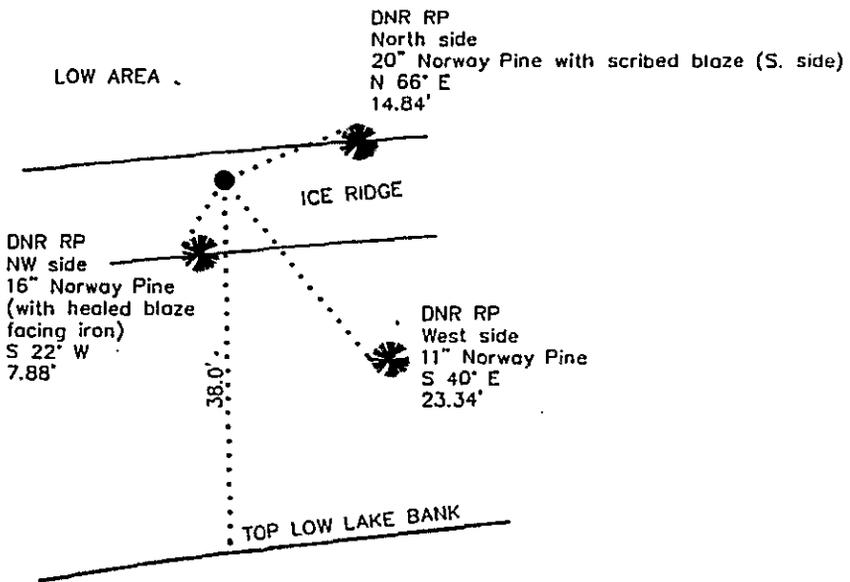

BASS LAKE

NOT TO SCALE  
BEARINGS OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page. DATE 10/29/92  
FILE SFT00031

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker SIGNATURE DATE 12-3-92

Registration No. 16098  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 3:00 P. M. on the 10 day of December A.D., 1992  
County Recorder Claudia Kayler  
By M Deputy  
DOCUMENT NO. 343672

Meander Corner 5, Section 27, Township 140 North, Range 26 West

The following offices were contacted for information on this corner:

Minnesota Secretary of State  
Minnesota Department of Transportation  
Cass County Surveyor  
Wallace F. Buckler, RLS  
Gary Stevenson & Associates  
AMI Surveyors & Mappers  
Widseth, Smith, Nolting, & Associates  
Walt Curo Surveying

- 1871 This corner was originally established by the U.S. General Land Office survey. The government notes show the corner marked with a post and witnessed by the following bearing trees:  
14" White Pine, N. 35° W., 14 links (9.24')
- 1949 Plat of Subdivision in Section 27 by Dean Anderson shows the M. C. as an iron pipe monument 613.9' south of the quarter corner.
- 1953 Information on microfilm (Book 239, Page 123) in the Cass County Surveyor's Office shows that Mr. Curo found the M. C. at a distance of 618.9' south of the quarter corner.
- 1971 Information from the Cass County Land Record sheet shows that R.F. Schneider found a 2" iron pipe at the M. C. with two scribed bearing trees:  
18" Norway Pine, N. 71° E., 14.7'  
15" Dead Jack Pine, N. 75° E., 87.5'  
A section subdivision by R.F. Schneider shows the M. C. at a distance of 597.57' south of the quarter corner.
- 1978 A Certificate of Survey by Widseth, Smith, Nolting & Associates shows an iron monument found at the M. C. at a distance of 598.10' south of the quarter corner.
- 1983 The DNR Bureau of Engineering found an old 1 3/4" iron pipe at a distance of 597.29' south of the quarter corner. A 20" Norway Pine with a scribed blaze was found N. 60° E., 14.84'. The 1 3/4" iron pipe was accepted as marking the M. C.

For information regarding this survey, contact the MN Department of Natural Resources, Bureau of Engineering, Survey Section, 500 Lafayette Road, St. Paul, MN 55155-4029

NW-5W  
Sec. 27  
NW-5E  
Sec. 27