

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Witness Corner to a meander corner on the north side of Dirty Nose Lake, common to Section 6, Township 142 North, Range 25 West, and Section 1, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

On January 29, 1997, Northern Lights Surveying and Mapping, Inc. monumented a witness corner 30.00m northerly of the single-proportioned meander corner position, on line, between the northeast corner of T.142N., R.26W. and the Witness Corner to the Northeast Corner, Section 24, T.142N., R.25 and 26W.

SKETCH OF REFERENCE TIES & EVIDENCE

T.142N., R.26W.

T.142N., R.25W.

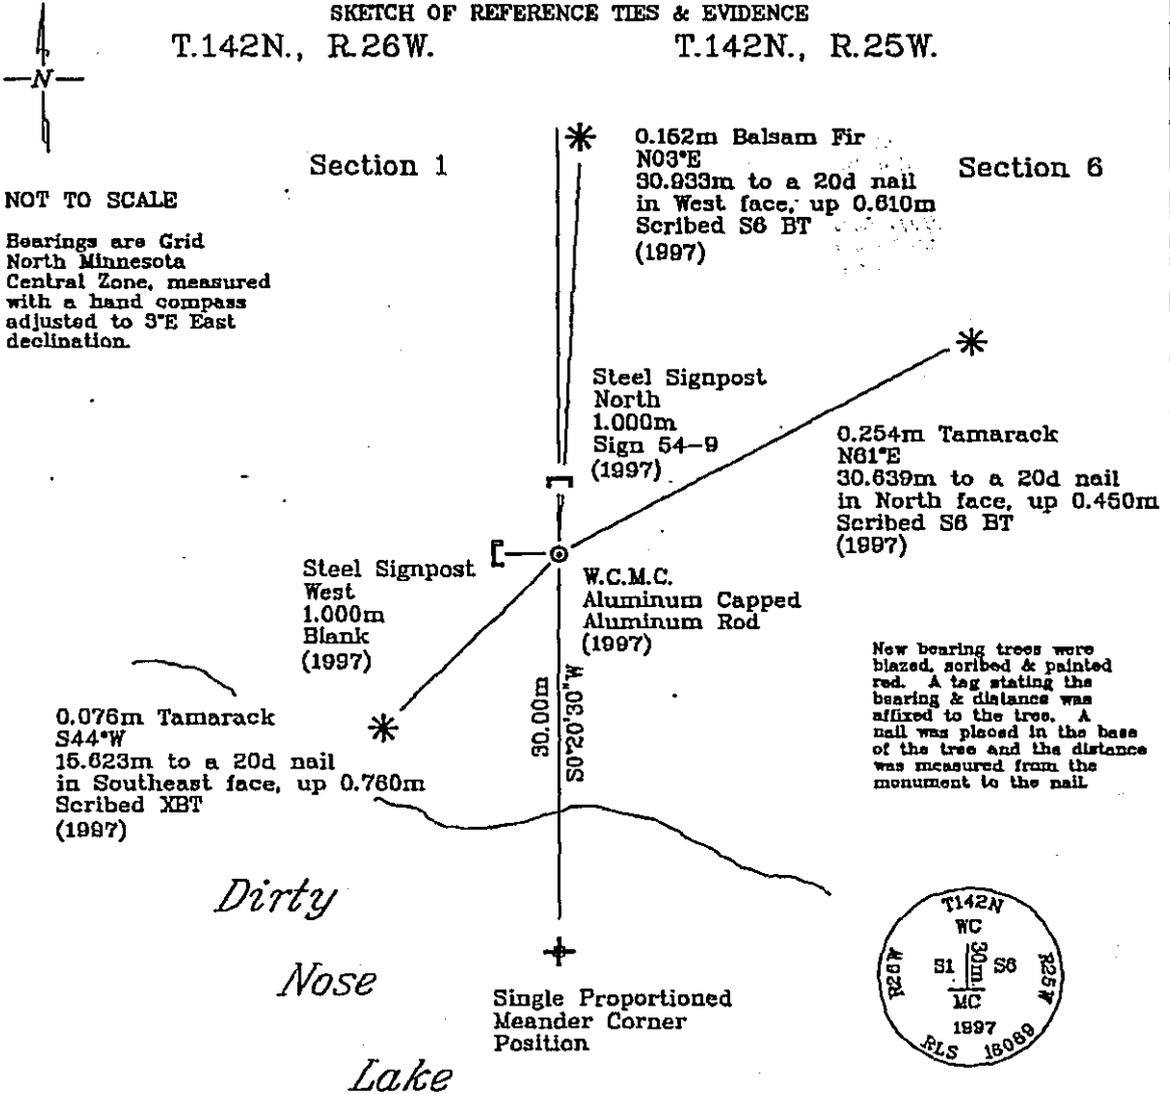

NOT TO SCALE

Bearings are Grid North Minnesota Central Zone, measured with a hand compass adjusted to 3°E East declination.

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

395046

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling 11-16-97
 LaVerne Leuelling Date

Registered Land Surveyor No. 18089
 NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 2:55 P .M. Date: Dec. 8, 1997
 Recorder - Claudine Kaylor
 By K.J. Deputy
 DOCUMENT NO. 395046

Statement of Evidence

Witness Corner to a meander corner on the north side of Dirty Nose Lake, common to Section 8, Township 142 North, Range 25 West, and Section 1, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1871; General Land Office (G.L.O.) survey notes; Deputy Surveyors Walker, Allen, and Putman set a wooden post for the meander corner and referenced it with the following:

8" Spruce (0.152m)	4" Spruce (0.102m)
N37°W	N19°E
21 Links (4.225m)	15 Links (3.018m)

The corner was set 25.12 chains (505.336m) north of the meander corner on the south shore of Dirty Nose Lake and 88.88 chains (1381.628m) south of the northeast corner of T.142N., R.26W.

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

January 29, 1997; Northern Lights Surveying and Mapping, Inc. crew of David Anderson and Joe Foster traversed to the proportioned meander corner position between the northeast corner of T.142N., R.26W., and the Witness Corner to Section Corner common to Sections 18, 19, 13, and 24, T.142N., R.25 and 26W. and conducted a search. As the position fell in Dirty Nose Lake, and no conclusive G.L.O. evidence was found, the crew monumented a Witness Corner to the Meander Corner (W.C.M.C.) N0°20'30"E, 30.000m of the proportioned MC positions, with a 3.658m long, 0.019m diameter aluminum rod with a 0.083m diameter aluminum cap, up 0.300m; they established the following references:

0.254m Tamarack	0.152m Balsam Fir	0.076m Tamarack
N61°E	N03°E	S44°W
30.639m to a 20d nail	30.933m to a 20d nail	15.623m to a 20d nail
in North face, up 0.450m	in West face, up 0.610m	in Southeast face, up 0.780m
Scribed S6 BT	Scribed S6 BT	Scribed XBT

Steel Signpost	Steel Signpost
West	North
1.300m	1.000m
Blank	Sign 54-9

The W.C.M.C. lies in a bog mat approximately 25m south of a balsam/birch stand on high ground.

Northern Lights Surveying and Mapping, Inc. Slater Township Field Book #3, pp. 33-34.

Coordinates:

Cass County North:

Northing = 67,800.308 meters
Easting = 176,239.287 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 337,795.721 meters
Easting = 828,366.644 meters

Latitude = 47°08'19.90156" North
Longitude = 93°54'08.74953" West