



A000647849

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

2/7/2019 12:32:43 PM

AS DOC #: A000647849

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SF Dep TX#: 151898

Twp 137 Rge 32 Index No. C.0-17.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 3, Township 137 N., Range 32 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On _____ found _____

- left monument as found
- lowered monument
- removed monument (explain)

On 11-28-2018 placed _____ a PK nail in the bituminous surface of the road.

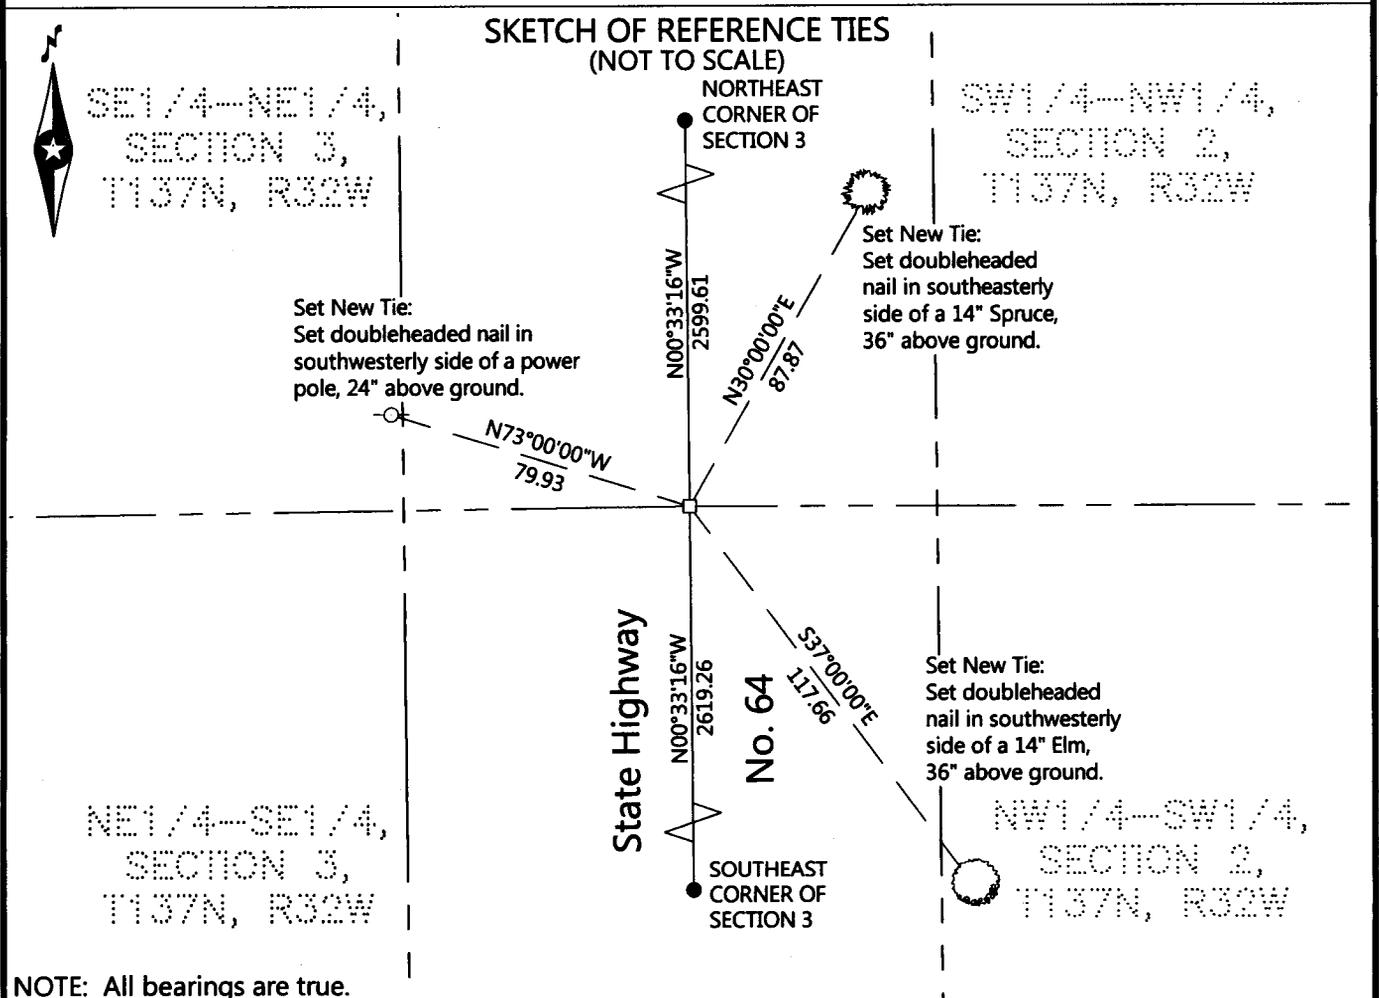

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this united States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman, Land Surveyor

Date 1/23/19 MN License No. 21367

STATEMENT ON EVIDENCE**East Quarter Corner of Section 3, Township 137 North, Range 32 West of the 5th Principal Meridian.**

In 1870, Richard Cronk, General Land Office (GLO) Deputy Surveyor, notes of the subdivision of Township 137 North, Range 32 West, set a post for the original corner and referenced it as follows:

8" W. Pine S26°E 51 links (33.66 feet)

5" W. Pine N83°30'W 28 links (18.48 feet)

The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

On November 28, 2018, a Northern Engineering & Consulting (NECI) survey crew searched for evidence of the corner. Finding nothing, they set a PK nail in the bituminous surface of State Highway No. 64, at the prorated distance between the found northeast and southeast corners of Section 3.

The monument and established references for the position are shown on the face of this document.

Analysis of the field evidence and survey measurements indicate that the monument set by NECI is the correct perpetuation of this corner.

County Coordinates (Cass County South)

Northing 301760.465

Easting 440949.511

