



A000653238

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/11/2019 10:25:47 AM

AS DOC #: A000653238

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY NG Dep TX#: 156297

Index No. G.0-5.0

I hereby certify that this document was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota

*Paul Herkenhoff*  
PAUL HERKENHOFF

Date 7/29/19 License No. 45875

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 7, Township 138, Range 32, 5TH P.M.


STATE OF MINNESOTA, County of CASS

At the location shown on the sketch:

- On \_\_\_\_\_ found \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 5/15/19 placed an 1/2 INCH BY 14 INCH IRON PIPE

SKETCH OF REFERENCE TIES (NOT TO SCALE)

ACCESSORY BEARING BASIS: BEARING

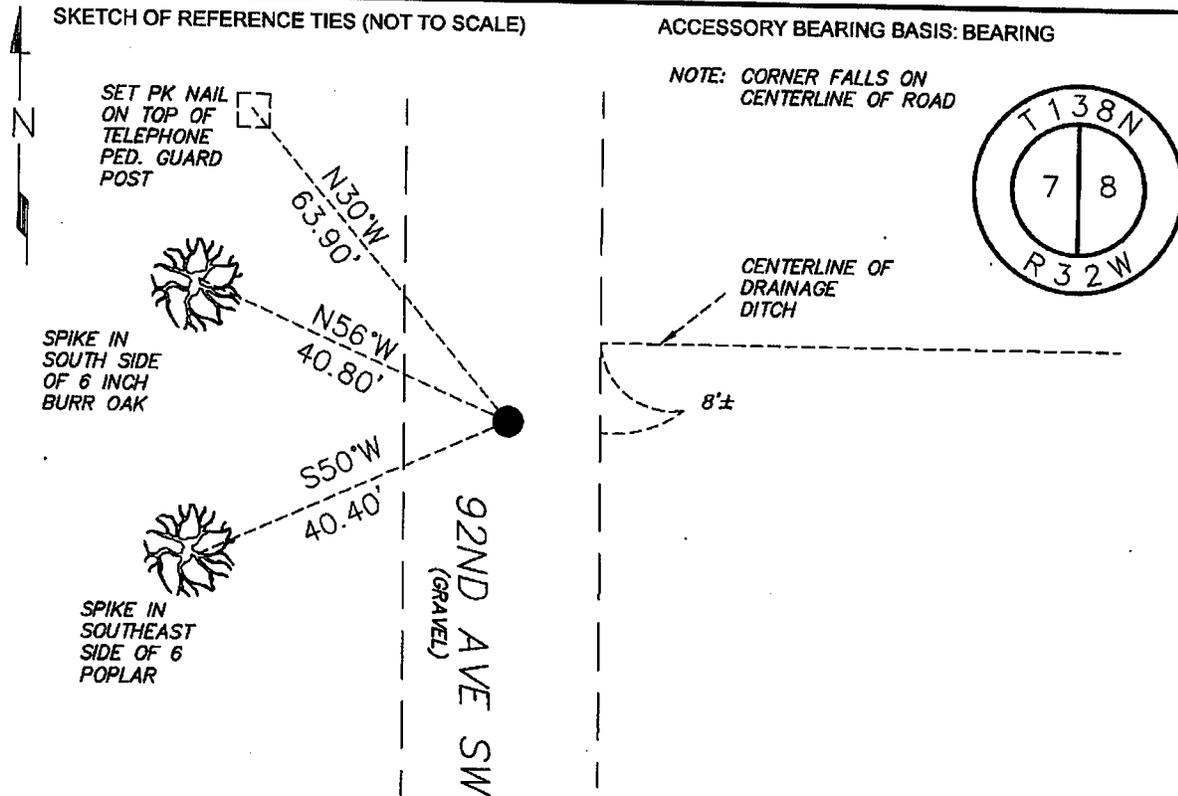

N= 328333.725 E= 425008.160

DATUM= CASS COUNTY SOUTH

NAD 83/96 ADJ.

US SURVEY FT.

Statement of evidence relative to this corner is on back of page.

Page 1 of 2 A000653238



**Index No. G.0-5.0**

Statement of Evidence:

**East Quarter Corner of Section 7, Township 138, Range 32 West, 5th Principle Meridian, Cass County, Minnesota**

- Dec. 1870      M. Black, General Land Office (GLO) Deputy Surveyor set a post for the original corner in the subdivision and noted the following accessories.1870
- 6" Tamarack   N75.5E 122 links  
        4" Tamarack   N77W 47 links
- June 1912      John W. Curo, Cass County Surveyor searched for the subject corner. Curo did not find any evidence of the corner or its accessories. Entry found in Curo Book 098, Page 97, which is on file in the office of the Cass County Surveyor's Office.
- 2019            Lakes Area Surveying did not recover any evidence of the corner. A ½" x 14" iron pipe with plastic cap stamped 50319 was placed midway and online between the Northeast and Southeast corners of Section 7 to mark the Quarter Corner. Reference ties were found or set as shown on the front of this certificate.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument established by Lakes Area Surveying in 2019 is the accepted location of this corner.**