

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


CENTER SOUTH SIXTEENTH Corner of Section 30, Township 144, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10/24/80 found a stump of one GLO bearing tree as marked in 1930.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/24/80 placed a 2" x 24" galvanized iron pipe with a 3" marked
DATE
brass cap down 1.0' below surface.

SKETCH OF REFERENCE TIES

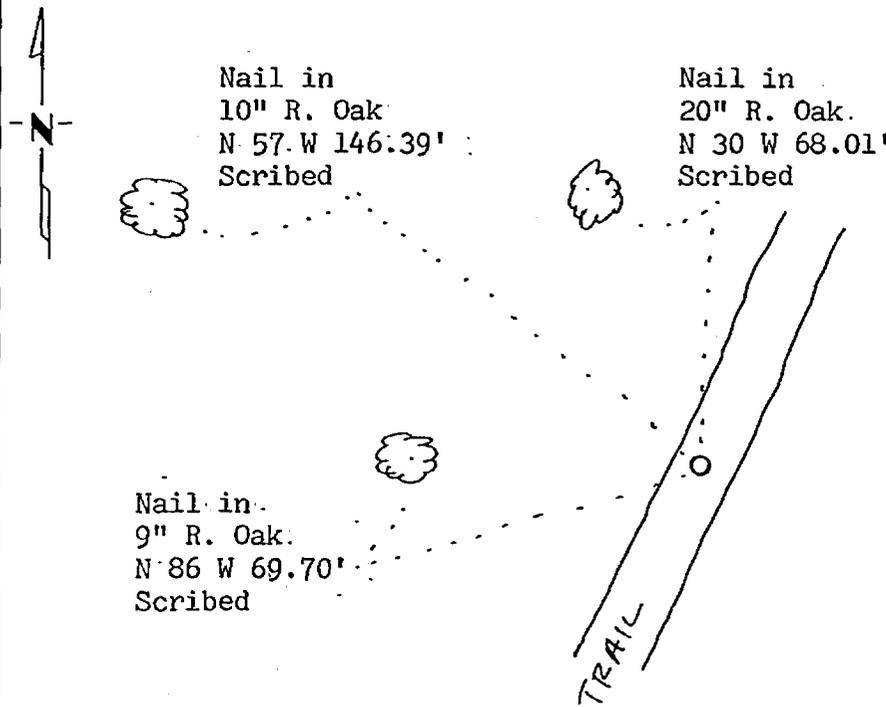

MONUMENT MARKED:

T144N R30W
 S 1/16
 C
 |
 C.
 S 30
 1980
 RLS No. 12684

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Samy H. Stevenson 9-11-82
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

264957
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:18 A. M. on the 14 day of Sept. A.D., 19 82

County Recorder Bentah Hendricks

By MS, Deputy

DOCUMENT NO. 264957

Statement of Evidence:

- 1930 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 6" Ash N $17\frac{1}{2}$ E 32 links and 18" W. Oak N $18\frac{1}{2}$ W 54 links.
- 1980 U.S. Forest Service technician G. Brama could not find the GLO brass cap monument. He found 25" W. Oak stump with scribe marks. No evidence found of the Ash. The area had been recently logged. Set a 2" x 24" galvanized iron pipe with a 3" marked brass cap down 1.0' in road from the Oak stump. Three new bearing trees were marked and are shown on this certificate. A 4" x 4" Cedar post was set 24' west of the corner.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 On Sept. 7 I visited the corner and found items as per the 1980 USFS reports. I accepted the new monument as marking the same position as when established in 1930 by the GLO resurvey based on the evidence of the one bearing tree found.