

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South 1/4 Corner of Section 27, Township 144N, Range 25W, 5th P.M.
 STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-27-1984 placed a 5/8" X 36" aluminum rod with 3" aluminum cap
DATE
stamped as shown. Down .30'

5° East declination

SKETCH OF REFERENCE TIES

Not to Scale

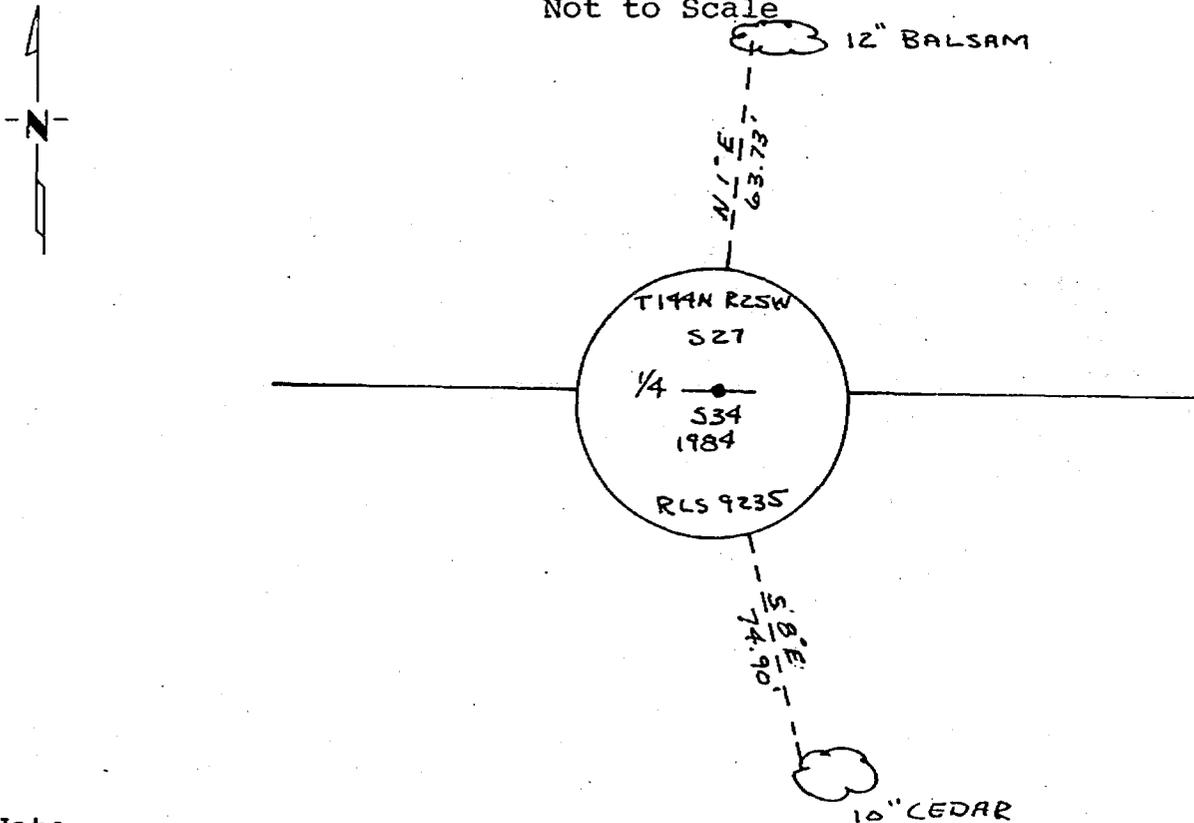

Note:

Trees are blazed & scribed with B.T. tag. Distances shown are to a 20^d nail in notch painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE

Registration No. 9235

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

281977
 OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:45 A.M. on the 15 day of May A.D., 1985

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 281977

Statement of Evidence:

V15

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and no trees for reference.

On July 20, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner but to no avail. This search area is determined from our field traverse.

On September 27, 1984, an additional search was made by Advance prior to reestablishing this corner at its "lost" position half way and on line between adjacent section corners and as shown on the sketch.