

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 32, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/29/90 placed a 2 inch x 48 inch Brass Cap Monument
DATE

Monument marked

SKETCH OF REFERENCE TIES
Not to scale

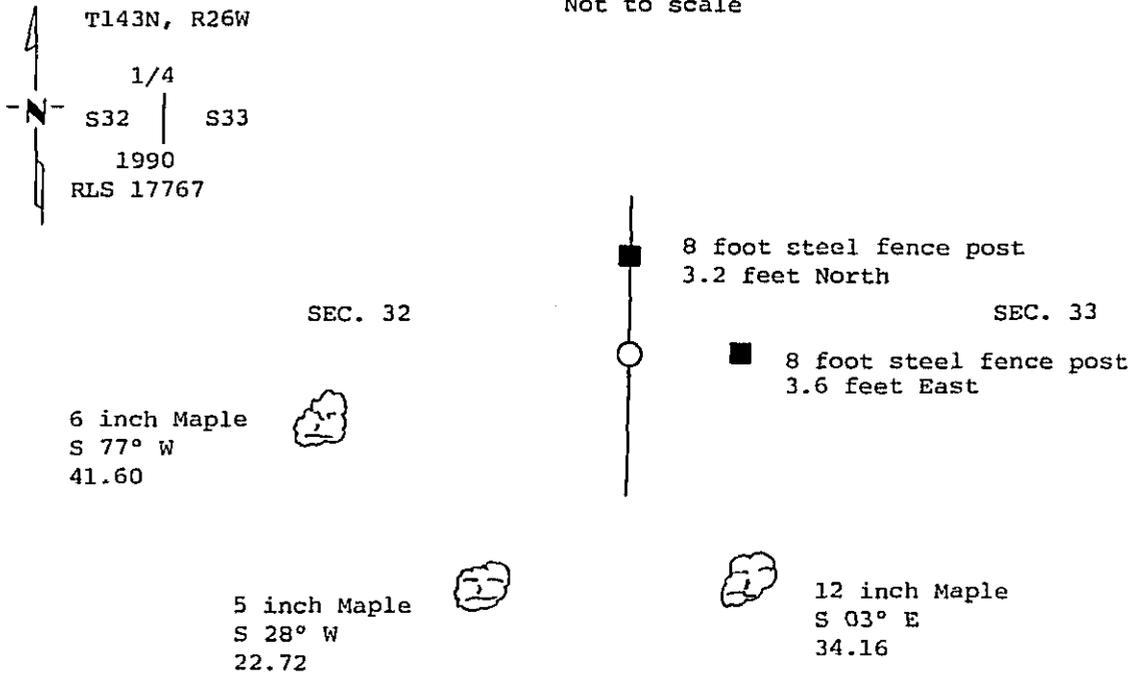

Bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

325154

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Stanger

Date 11/14/90 Registration No. 17267

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:08 P. M. on the 21 day of November A.D., 19 90

County Recorder Clonidine Kaylor

By m.j., Deputy

DOCUMENT NO. 325154

Statement of Evidence:

X9 East quarter corner section 32

1/4 Cor. 32 and 33 (E 1/4 Cor. Sec. 32)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Birch 4" S 35 degrees W, 5 Links (3.30 feet)
Birch 5" N 81 degrees E, 15 Links (9.90 feet)
- 11-16-1989 Personnel from Kovanen & Osufsen Inc. chained to area from section corner to north, Norway pine planting in this area, no evidence of corner found.
- 8-29-1990 Personnel from Kovanen & Osufsen Inc. made additional search of area, found nothing. Then set a 2" x 48" brass capped monument. This position is midway and on line between the recovered NE corner of section 32 and the reestablished SE corner of section 32. The following witnesses were established:
Maple 6" S 77 degrees W, 41.60 feet
Maple 5" S 28 degrees W, 22.72 feet
Maple 12" S 03 degrees E, 34.16 feet
Set 8' long steel sign post with sign attached, East 3.6 feet
Set 8' long steel sign post with sign attached, North 3.2 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.