

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 33, Township 143, Range 25, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 1989 found a 1/2" COPPERWELD ROD WITH BRONZE CAP 8" BELOW ROAD SURFACE IN
DATE CENTERLINE OF COUNTY ROAD 137
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE _____

NOT TO SCALE

SKETCH OF REFERENCE TIES

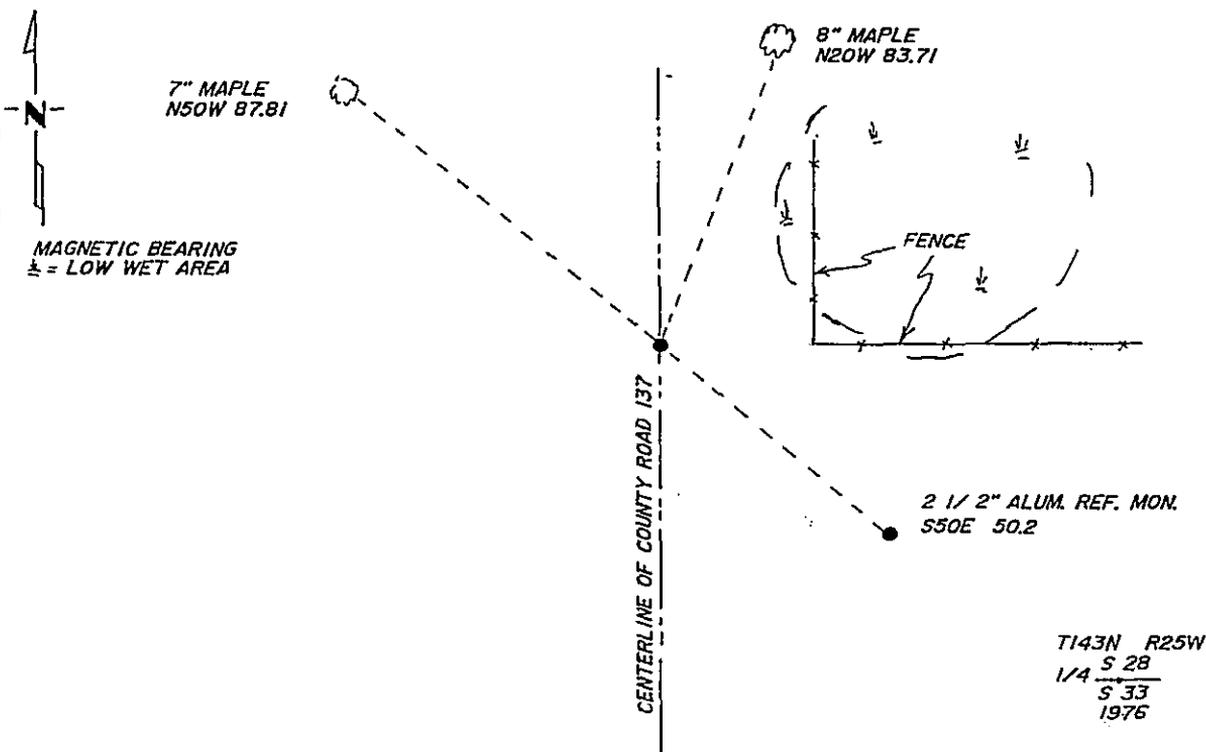

NOTE: ALL BT'S ARE BLAZED, SCRIBED AND PAINTED WITH RED ENAMEL PAINT WITH BT SIGNS, AND ALL MEASUREMENTS ARE HORIZONTAL TO SPIKE IN SIDE OF TREE

Statement of evidence relative to this corner location is on back of page.

326346

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter C. Cross
SIGNATURE

1-22-91
DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:55 A. .M. on the 25 day of January A.D., 19 91

County Recorder Cloude Kayler

By M.S., Deputy

DOCUMENT NO. 326346

Statement of Evidence:

v-11 N 1/4 Cor. of Sec. 33., T. 143 N., R. 25 W.

1872 Original survey by Hayward and Griffin, set a wood post and marked bt's as follows; 10" Ash S55E 18 lks
8" Sugar N50E 14 lks

1914 F.A. Donner found both bt's and set an wood post. recorded in county survey book C pg. 551

1976 B.L.M. made a dependent resurvey of part of the township and set a 1/2" x 24" copperweld monument with a bronze cap in centerline and 8" below surface of the county road. They didn't find anything here so they accepted the road centerline, and a fence to the east has the best evidence of the true position of the corner. They set reference monuments as follows;
aluminum pipe with cap N60E 45.5 ft.
aluminum pipe with cap S50E 50.2 ft.

1979 Gary Stevenson, RLS uses this monument for a survey in section 33.

1989 The USFS used this corner as part of a traverse around section 28.

1989 Walt Curo finds B.L.M. monument in place. The ref. monument N60E is missing.

1990 Walt Curo accepts the B.L.M. monument for the corner as this position was monumented and accepted by B.L.M. as the true position for this corner and no other evidence remains.