

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast \_\_\_\_\_ Corner of Section 24, Township 143, Range 25, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 10/14/94 found a 1" iron pipe with stamped aluminum cap  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree

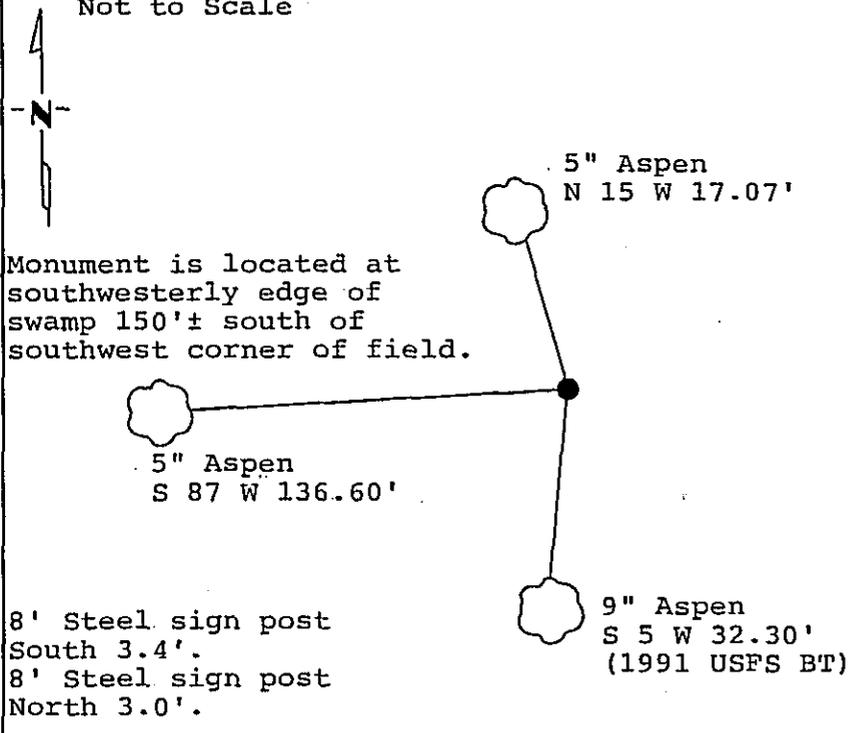

MONUMENT STAMPED:  
 T143N  
 SC |  
 R25W | 13 |  
 | 24 |  
 1975

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*[Signature]* 3/16/95  
SIGNATURE DATE

Registration No. 21367

- Land Surveyor
- County Surveyor

365399  
 OFFICE OF THE COUNTY RECORDER  
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 12:20 P.M. on the 16th day of MARCH A.D., 1995

County Recorder Claudine Kayla

By N.O., Deputy

DOCUMENT NO. 365399

Statement of Evidence:

Northeast corner, Section 24, Township  
143 North, Range 25 West, 5th Principal  
Meridian, Cass County, Minnesota

N-25

1867 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the east line of Township 143 North, Range 25 West. The notes indicate that he set a wood post and marked the following bearing trees: a 10 inch Birch North 20 degrees West a distance of 39 lks (25.74 feet); and a 12 inch Birch South 30 degrees West a distance of 11 lks (7.26 feet).

1963 in May, Itasca County Survey Office notes in Loose Leaf Township Field Book of Township 54 North, Range 27 West on page 8 show that W. Benzing traversed the 3rd Guide Meridian and found no evidence of the corner.

1975 on August 7, Itasca County Survey Office notes in Loose Leaf Township Field Book of Township 54 North, Range 27 West, on page 42 and 51 show that they traversed and set a 2 inch County aluminum monument with aluminum cap by single proportion measurement and marked the following bearing trees: a 14 inch Aspen South 65 degrees West a distance of 7.85 feet (tag); a 4 inch Aspen South 4 degrees East a distance of 31.76 feet; and a 12 inch Aspen North 54 degrees West a distance of 27.24 feet.

1976 Bureau of Land Management Dependent Resurvey, notes on file in Secretary of States Office, found Itasca County 2 inch aluminum monument with aluminum cap and all three County bearing trees in good condition.

1991 on December 11, United States Forest Service notes for Township 143 North, Range 25 West, on file in United States Forest Service office in Cass Lake, Minnesota, in Book 1, Page 33, show that United States Forest Service Technicians found 1 and 1/2 inch iron pipe with 2 and 1/2 inch aluminum cap set by Itasca County. They marked the following bearing trees: an 8 inch Aspen South 5 degrees West a distance of 32.30 feet; a 13 inch Aspen North 47 degrees West a distance of 27.62 feet; a 15 inch Aspen South 68 degrees West a distance of 8.23 feet; and placed a steel sign post 3.5 feet South.

1994 on October 14, a Landecker & Associates, Inc. survey crew traverse through corner. They found the 1991 South 5 degrees West bearing tree, now 9 inches in diameter. The 13 and 15 inch 1991 bearing trees are dead. On December 1, they tie out found 1 inch iron pipe and mark bearing trees as shown and set steel sign posts as noted on front of this certificate. Landecker & Associates, Inc. accepts the found monument as marking the lost, single proportion position as established by Itasca County and perpetuated by the Bureau of Land Management and United States Forest Service.