

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


E 1/4 Corner of Section 19, Township 140, Range 30, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-30-09 found a iron pipe with orange plastic cap, "RLS 17768" 0.5 feet below the gravel surface.
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

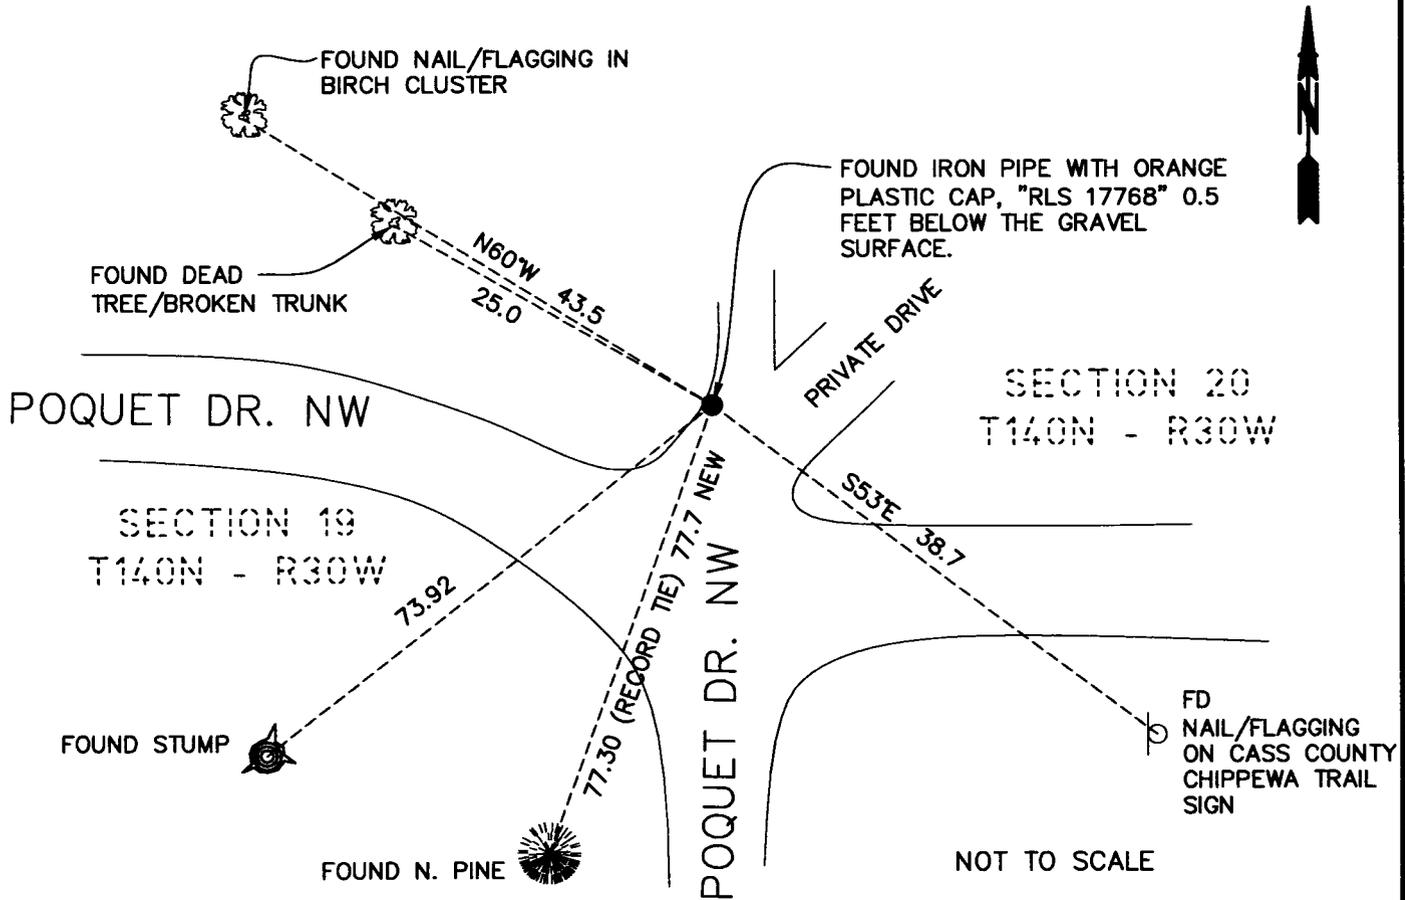

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Kathryn M. Norby 11-6-09
SIGNATURE DATE

Registration No. 40035

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer



A000592266
OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/7/2013 10:39:28 AM

AS DOC #: A000592266

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Page 1 of 2 A000592266

STATEMENT OF EVIDENCE

The East Quarter Corner of Section 19, Township 140 North, Range 30 West of the 5th Principal Meridian.

This corner was originally a wood post set by the Government Land Office in 1865.

In 1910, Mr. John Curo, Cass County Surveyor, found evidence of the two original bearing trees and set an iron pipe. (Book B of Surveys page 76)

In, 1965, County Surveyor R.F. Schneider found the iron pipe and set new ties. (Book D of Surveys page 451)

In 1975, Walter E. Curo filed a "Certificate of Location of Government Corner" under Doc. No. 223886 which indicates he found the iron pipe and replaced it with a cast iron monument and set new ties.

On 10-30-09, a survey crew from Ulteig Engineers found an iron pipe with an orange plastic cap "RLS 17768" 6" below the gravel surface. Ties from the previous Certificate were found as shown and new ties were established.

