

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 14

Township 138 N, Range 31 W, 5th P.M.

STATE OF MINNESOTA, COUNTY OF Cass



A000599906

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/27/2014 10:38:17 AM

AS DOC #: A000599906

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep



On _____, found a(n): _____
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 11/27/2012, set a(n): 5/8" X 24" Rebar With Plastic Cap
DATE
Stamped "Leas MN 42619" up 0.4'.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

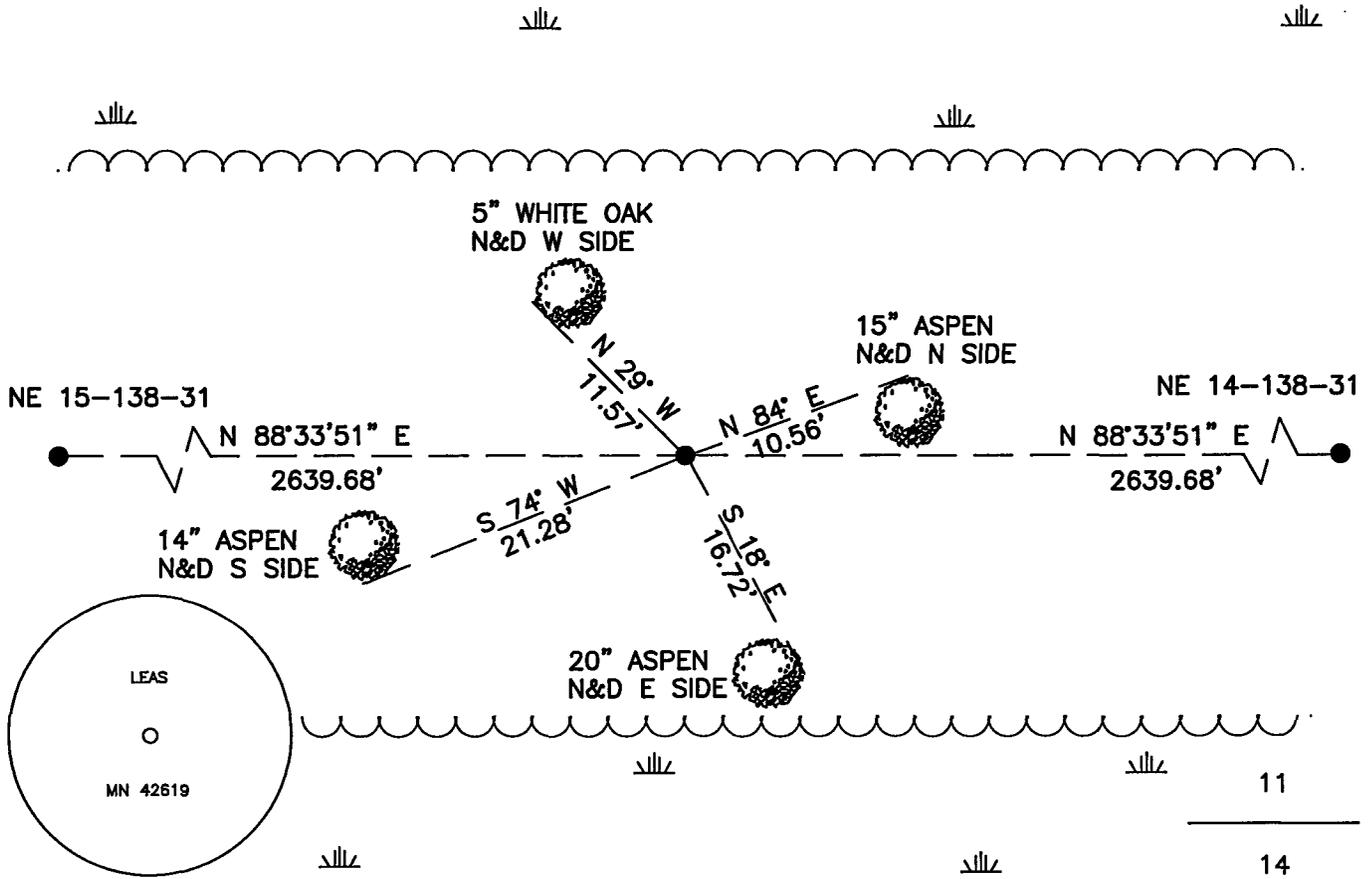

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 326167.720

Easting: 475103.641

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature
Jarrett M. Leas, Minnesota License No. 42619

1-14-14
date

Page 1 of 2 A000599906



North Quarter corner Section 14, Township 138 North, Range 31 West, 5th Principal Meridian.

- Nov. T.B.Walker, GLO Deputy Surveyor, in the notes of the subdivision of Township 138 North, Range 31 West
1870 set a post for the original corner and referenced it as follows:
6" Tamarac N 56° E 30 links 20" W. Pine S 56° W 67 links
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the
Cass County Surveyor's Office (CCSO).
- Nov. John Curo, Book 26, Page 26, states "tried to find the ¼ sec cor of sec 11 &14, but could not find it".
1919
- Oct. KLJ field crews search and find no evidence of the corner. KLJ computes a lost corner position from
2012 proportioning between the SW and SE corners of section 11, splitting the overall distance of 5279.36' on
a bearing of N88°33'51"E and sets a new monument stamped "Leas MN 42619". Monument is witnessed
with the ties shown on the front of this certificate.