

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 29, Township 138N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
Date _____

_____ left monument as found _____ lowered monument _____ removed monument (explain)

On 12/21/2012 placed a 3/8" REROD WITH RLS CAP NO. 17774
Date _____

SKETCH OF REFERENCE TIES

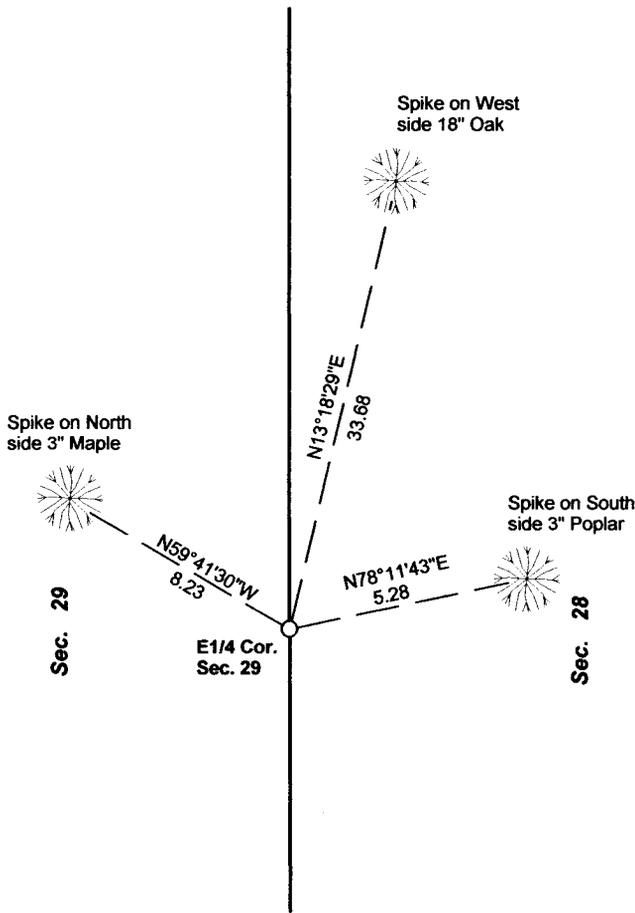

Tie Distances are measured to the spikes.

Cass County Coordinate System (South Zone)
N= 312487.9303 E= 461728.8942

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 28 Dec 2012
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000603800

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

7/10/2014 11:20:31 AM

AS DOC #: **A000603800**

PAGES: **2**

REC FEES: **0.00**

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR _____ Dep



INDEX NO. T.0 - 9.00

STATEMENT OF EVIDENCE

EAST QUARTER CORNER SECTION 29, TOWNSHIP 138N, RANGE 31W, 5TH P.M.

1870 T.B. WALKER GENERAL LAND OFFICE (GLO) DEPUTY SURVEYOR SET A POST AND MARKED B.T.'S. REFERENCES ARE:

6" BIRCH	12" WHITE PINE
S 10 W	S 84 E
12 LKS	23 LKS

2012 MARVIN KOHOUT, LS NO. 17774, AND DOUG STILLE, TECHNICIAN, OF KOHOUT LAND SURVEYING SEARCHED FOR CORNER, NOTHING FOUND. SET 3/8" REROD WITH RLS CAP NO.17774, MIDWAY AND ON LINE BETWEEN THE NE CORNER OF SECTION 29 AND THE NE CORNER OF SECTION 32.