



A000610236

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/19/2015 11:01:33 AM

AS DOC #: A000610236

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 121588

Twp 138 Rge 30 Index No. G.0-05.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 7, Township 138 N., Range 30 W., 5th P.M.
State of Minnesota, County of Cass.


At the corner location shown on the sketch:

On 23 Jan 2014 found a 1.25 inch iron pipe.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES
NOT TO SCALE

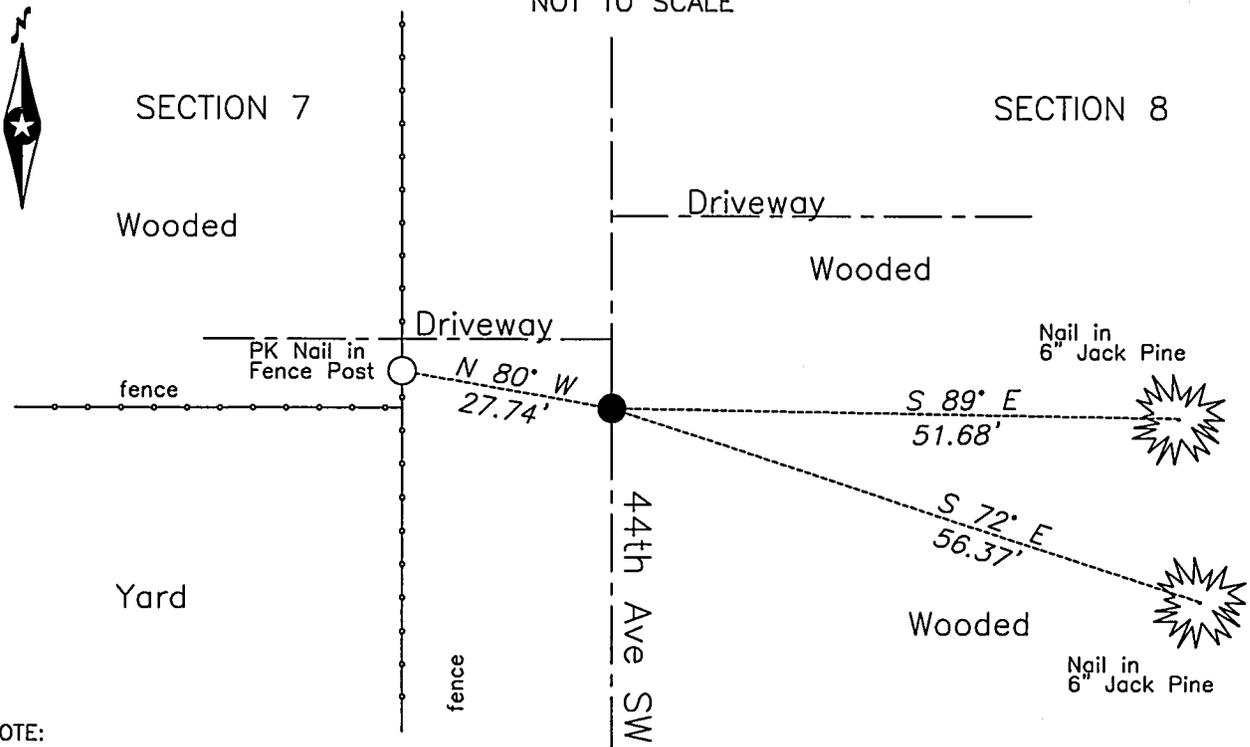

NOTE:
Datum is MN State Plane, North Zone

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.
I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen
Date 3/13/15 MN License No. 16459

**Index No. G.0-05.0**Statement of Evidence**East Quarter corner Section 7, Township 138 North, Range 30 West, 5th Principal Meridian.**

Aug.24, 1865 G.B.Wright, GLO Deputy Surveyor, in the notes of the subdivision of this township set a post for the original corner and referenced it as follows:

6" Blk Pine S 65°W 19 links (12.54 feet) 5" Blk Pine N 76°E 26 links (17.16 feet)

Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are on file with Cass County Highway Department/Surveyor's Office.

Nov. 2000 B.Grivna, LS 17253, Central Minnesota Surveying, Inc., in a Certificate of Survey for Dabill in the NE ¼ of the SE ¼ of Section 7, on file with Cass County Highway Department/Surveyor's Office, portrays a monument found at the subject quarter corner. The survey gives a distance of 1325.48 southerly to the southeast corner of said NE ¼ of the SE ¼, where no monument is shown.

June 2002 D.Landecker, LS 17008, Landecker & Associates, Inc., in a Certificate of Survey for Robinson in the SW ¼ of the SE ¼ of Section 8, on file with Cass County Highway Department/Surveyor's Office, portrays a monument found at the subject quarter corner and a distance of 5271.43 feet easterly to the East Quarter corner of Section 8.

June 2004 L.Nord, LS 22033, Eagan, Field, & Nowak, Inc., in a Certificate of Survey for Nextel Communications in the SW ¼ of the NW ¼ of Section 8, on file with Cass County Highway Department/Surveyor's Office, portrays the subject quarter corner as a found monument. The survey gives a distance of 2651.02 feet for the west line of the SW ¼ of Section 8.

May 2009 T.Freeman, LS 21367, Landecker & Associates, Inc., in a Certificate of Survey for Fick in the SE ¼ of the SE ¼ of Section 7, on file with Cass County Highway Department/Surveyor's Office, portrays monuments found at the subject quarter corner and the Southeast corner of Section 7. The survey gives a distance of 2651.06 feet for the east line of the SE ¼ of Section 7.

Jan. 2014 NWSE survey crew of Bomstad and O'Beirne recovered a 1-1/4" inch iron pipe, down 2.0 feet, on centerline of gravel 44th Ave. SW. The monument, together with the recovered and established references for the position is shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument found by the NWSE in 2014 is the accepted location of this corner.