


**CERTIFICATE OF LOCATION OF GOVERNMENT CORNER**Northeast Corner of Section 8, Township 139N, Range 30W, 5th P.M.STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 3/16/81 found a 1" round iron shaft down 0.5'  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 9/1/81 placed a Minnesota Department of Transportation Cast Iron  
DATE Monument (down 0.3 feet)

## SKETCH OF REFERENCE TIES

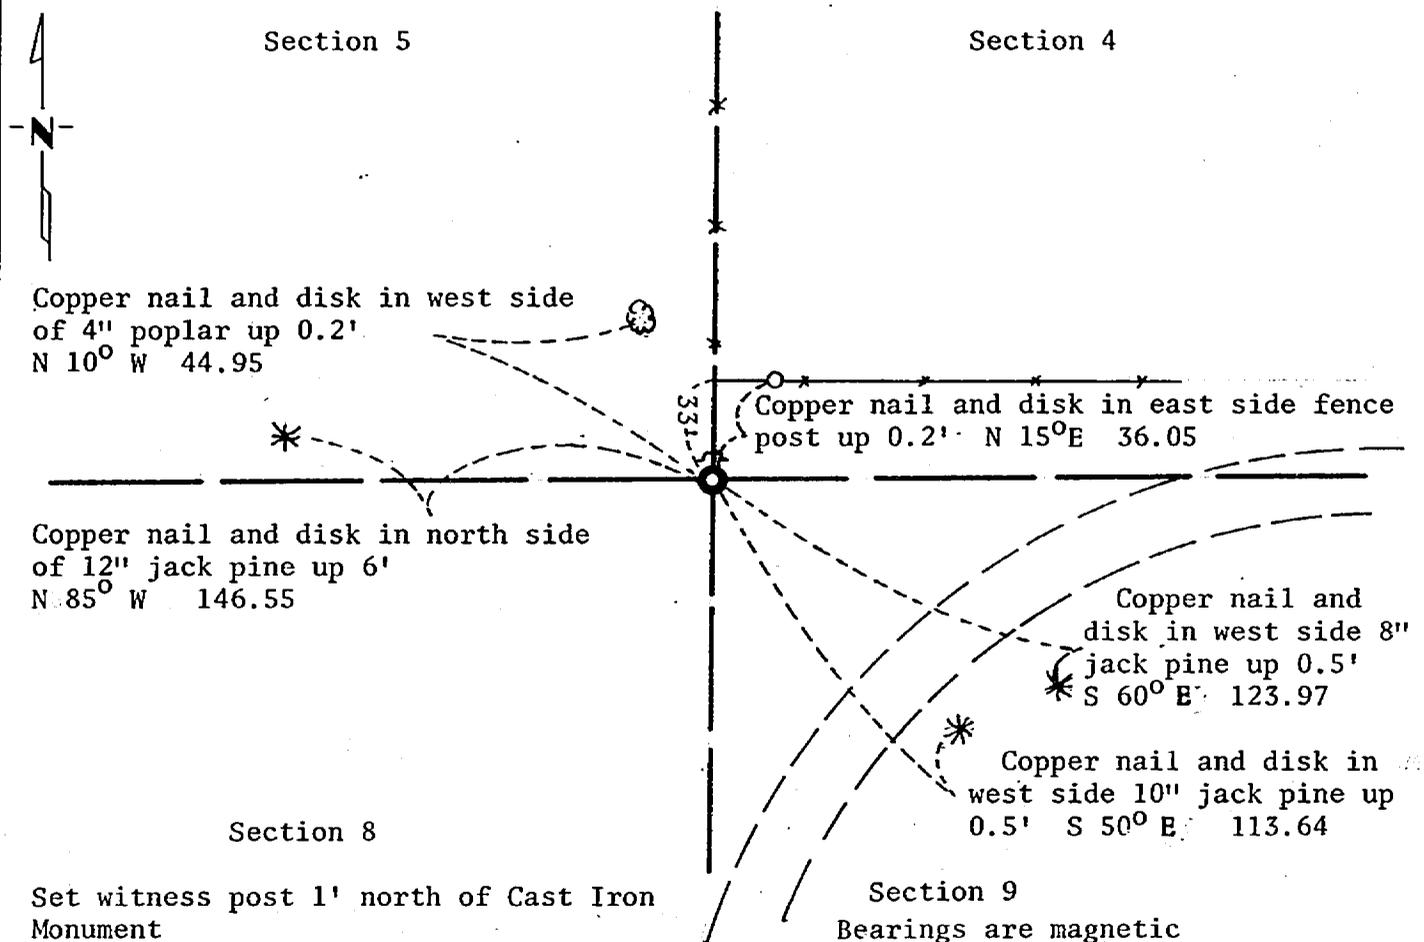

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nilan 3/4/83  
SIGNATURE DATE

Registration No. 11865 Land Surveyor,  Professional Engineer County Surveyor,  County Engineer

267945  
OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:35 A.M. on the 4 day of April A.D., 1983

County Recorder Claudine KaylerBy MS, DeputyDOCUMENT NO. 267945

**Statement of Evidence:**

Northeast Corner Section 8, Township 139 North, Range 30 West, 5th Principal Meridian.

The Original Public Land Survey was run in 1865 and a wood post was set to mark the corner.

In 1907, Mr. John Curo set an 8" x 8" concrete post for the corner from the original bearing trees.

In 1981, the Minnesota Department of Transportation found a 1" iron bar at the corner location. This monument fits the occupation lines in the area and agrees with the Government distances to the north and south. This area has been disturbed by road construction and no evidence of the concrete monument was found.

The Minnesota Department of Transportation accepts the 1" iron bar as the correct position for the corner.

For details and survey analysis, contact the Minnesota Department of Transportation Surveys Office in Brainerd, Minnesota.