

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 19, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 1980 found a GLO brass cap monument as set in 1919.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

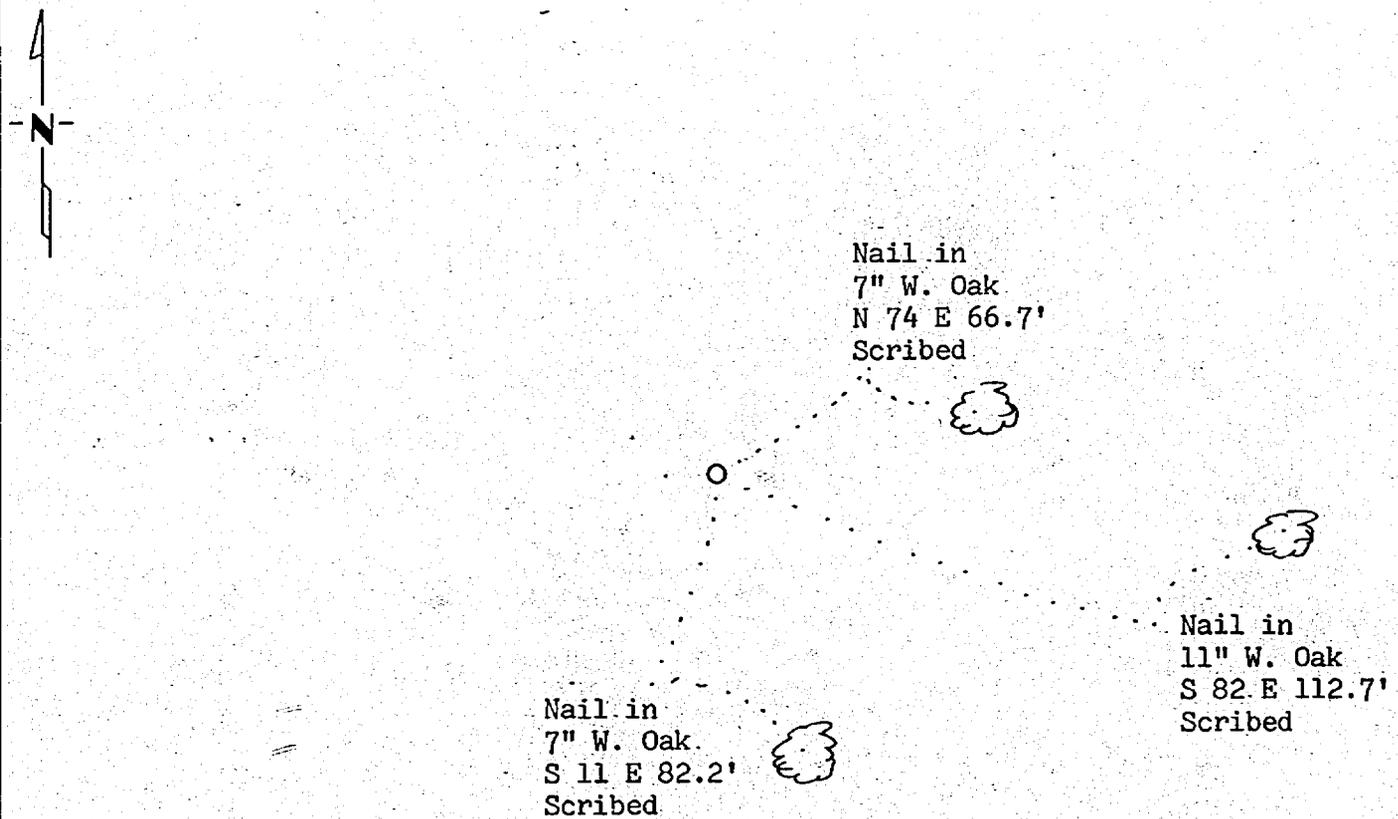

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Dany H. Stevenson 9-14-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

279 273
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:55 P. M. on the 5 day of Dec. A.D., 19 84

County Recorder Claudia Kayler
By MS, Deputy

DOCUMENT NO. 279273

Statement of Evidence:

- 1874 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: No bearing trees available.
- 1919 U.S. General Land Office dependent resurvey reestablished this corner by proportionate distance. No evidence found of original corner. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 20" W. Oak S 77-45 E 162 links and 8" N. Pine S 10-45 W 300 links.
- *
1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument in good condition up 14". The following bearing trees were found: W. Oak windfall, burned and rotted, S 78-E 106.9', and rotted Pine stump S 11. W 198.0'. Three new bearing trees were marked and are shown on this certificate. Piled rocks around the monument. Corner is in grass marsh 30' west of trees.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.
- * 1922 *County Surveyor's Record Book D, P. 75 shows a survey by J.H. Flynn. Notes show government iron found.*