

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 16, Township 135 N., Range 32 W., 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 8/30/85 found a 1½" I.P. flush, top 1.5' bent east, in line with
DATE
centerlines of twp rd east and trail north
- left monument as found, lowered monument, removed monument (explain)
- On 11/14/85 placed a 4"x20" County cast iron monument
DATE

SKETCH OF REFERENCE TIES

Not to scale

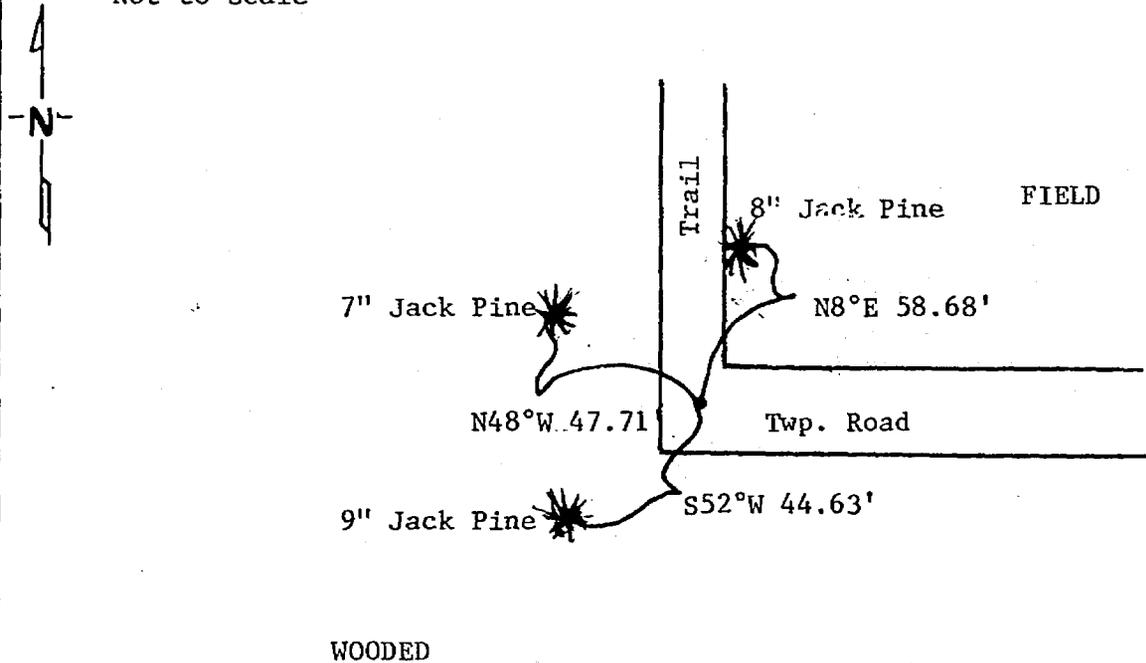

Distances to nail on side of tree, double blazes on trees
 Bearings assumed using 5° declination

Statement of evidence relative to this corner location is on back of page. 286244

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cason 11-29-85
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:50 P.M. on the 9 day of Dec. A.D., 1985

Register of Deeds Clouline Kayler

By MS, Deputy

DOCUMENT NO. 286244

STATEMENT OF EVIDENCE Northeast Corner Section 16, T.135N., R.32W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 8" Bl. Pine S19½°E 16 lks., 8" Bl. Pine S63°W 19 lks., 8" Bl. Pine N76°W 5 lks., 8" Bl. Pine N18°E 19 lks.
- 1985 On August 30, Terry Freeman, Cass County Survey Technician, and Dan Marcum, Forester, found a 1½" I.P. flush with top 1.5' bent east, in line with centerlines of twp. rd. east and trail north.
9" Jack Pine S52°W 44.63'
7" Jack Pine N48°W 47.71'
8" Jack Pine N8°E 58.68'
- 1985 On November 14, Terry Freeman and Walt Curo, Cass County Surveyor, pulled I.P. and set in its place a County cast iron monument.