

**CERTIFICATE OF LOCATION OF GOVERNMENT CORNER**

For the Center West One-sixteenth Corner of Section 13, Township 144 North, Range 29 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.


On January 21, 1982, to mark this corner position, we set a 2.5 inch (outside diameter) by 60 inch long galvanized iron pipe topped with a 3 inch diameter brass tablet, up 12 inches and stamped as shown in the sketch.

**SKETCH OF REFERENCE TIES**

Top of Page is NORTH

(not to scale)

decl: 5° E

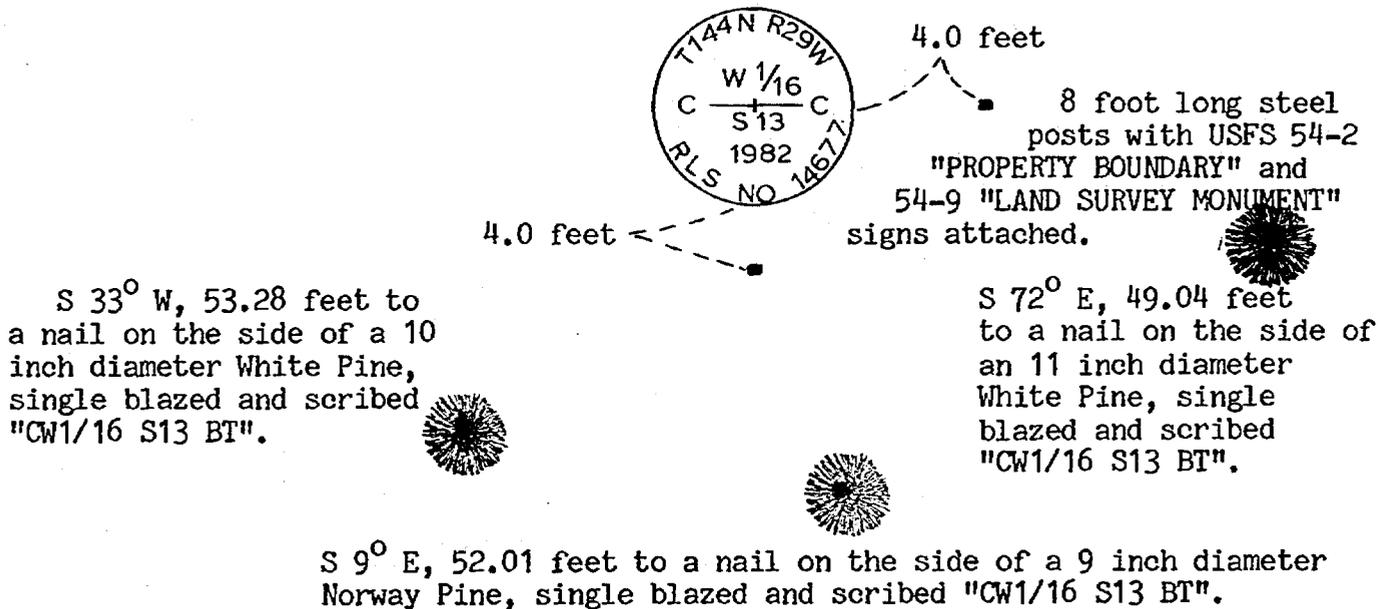

S 33° W, 53.28 feet to a nail on the side of a 10 inch diameter White Pine, single blazed and scribed "CW1/16 S13 BT".

4.0 feet — 8 foot long steel posts with USFS 54-2 "PROPERTY BOUNDARY" and 54-9 "LAND SURVEY MONUMENT" signs attached.

S 72° E, 49.04 feet to a nail on the side of an 11 inch diameter White Pine, single blazed and scribed "CW1/16 S13 BT".

S 9° E, 52.01 feet to a nail on the side of a 9 inch diameter Norway Pine, single blazed and scribed "CW1/16 S13 BT".

All bearing trees are marked with red enamel, and a USFS 54-3 "BEARING TREE TAG".

Statement of evidence relative to this corner position is on the back.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

*Kenneth L. Whitehorn*  
 Kenneth L. Whitehorn

Date *July 2, 1986* Registration No. 14677

*290149*  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the office of the County Recorder this *16* day of *July*, 19 *86*, at *9:40* A.M. and assigned DOCUMENT NUMBER *290149*.

*Claudine Kaylor*  
 Claudine Kaylor, County Recorder  
 m)

**STATEMENT OF EVIDENCE:** For the Center West One-sixteenth Corner of Section 13, Township 144 North, Range 29 West of the 5th Principal Meridian

This corner position was not monumented in the original Township survey by P. H. Conger, Deputy Surveyor, under contract to the General Land Office in 1873. The notes for this survey are on file in the Office of the Secretary of State, St. Paul, Minnesota.

No intervening history has been recovered that records any monumentation or perpetuation of this corner position.

A search area for this corner position was determined using single proportionate methods based on coordinates determined from an EDM/Teodolite traverse between the West Quarter and Center Quarter Corners of said section 13. On January 21, 1982, G Brama, H. Hough and K. Gehrke, USDA-Forest Service (USFS), searched this area for evidence of a corner position but nothing was found. This proportionate position was then monumented and referenced as shown on the front of this document.