

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 35, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On Sept. 16, 1985 found a rotted wood stake down 1.25'
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/14/86 placed a cast iron monument down 8" in centerline N-S rd.
DATE
and inline with centerline W.

SKETCH OF REFERENCE TIES

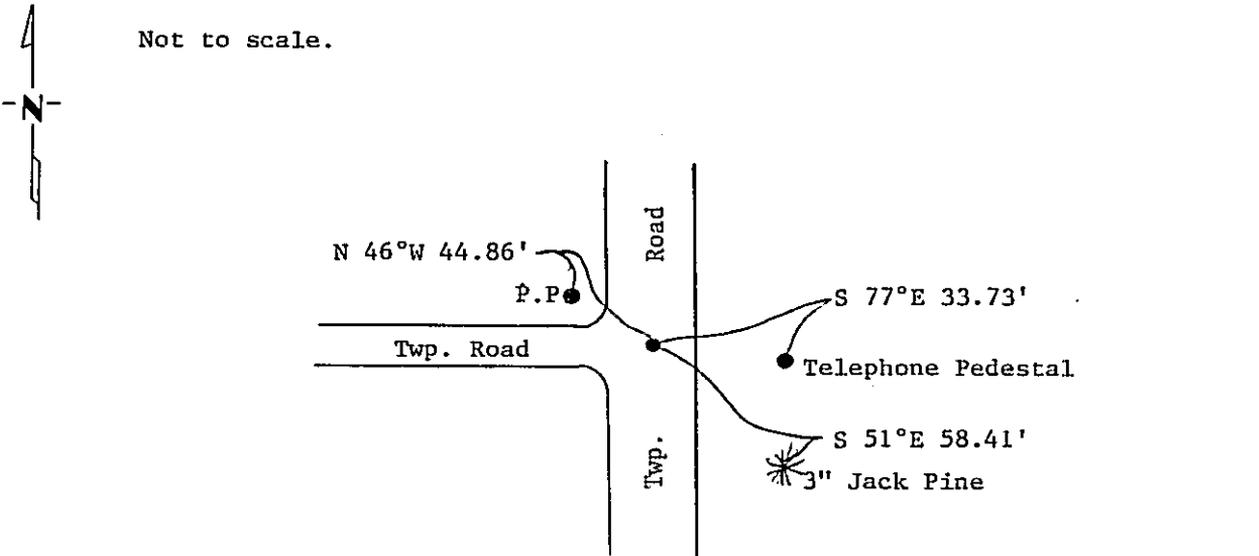

Measurements are to nail in side of object.
 Bearings assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297508

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Olson 1-23-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Olson

I hereby certify that this document was filed in the Co. Recorders office at 10:10 A. .M. on the 12 day of June A.D., 19 87

County Recorder Conline Kayler
 By MS, Deputy

DOCUMENT NO. 297508

Statement of Evidence: Northeast Corner Section 35, T.135 N., R.32 W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 10" Bl. Pine S 71½E 64 lks., 16" N. Pine S 30°W 21 lks., 8" W. Birch N 24°W 31 lks., 20" N. Pine N 16°E 7 lks.
- 1985 On Sept. 16, Terry Freeman, Cass County Survey Technician and Ken Meyer, backhoe operator, dug in intersection of roads. Dug 10' E-W x 10' N-S x 3' deep. Found 2" dia. rotted wood stake. down 1.25'
- 1986 On August 14, Terry Freeman, Jim Cripps and Norman Maunu set cast iron monument in place of rotted stake, in centerline of roads N-S- and in line with centerline road W.