


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Mile Post 15 Leech Lake Reservation Boundary, Township 141 North, Range 30 West, 5th P.M.
State of Minnesota, County of Cass

On 10-05-1990 Northern Lights Surveying & Mapping set a 2 1/2" brass capped iron pipe at the "lost" position. The position was on a line defined by proportioned points on the east & west section lines of section 23, T141N, R30W. The Mile Post was then proportioned between the intersections of the east & west line of T141N, R30W with the reservation boundary.

SKETCH OF REFERENCE TIES & EVIDENCE

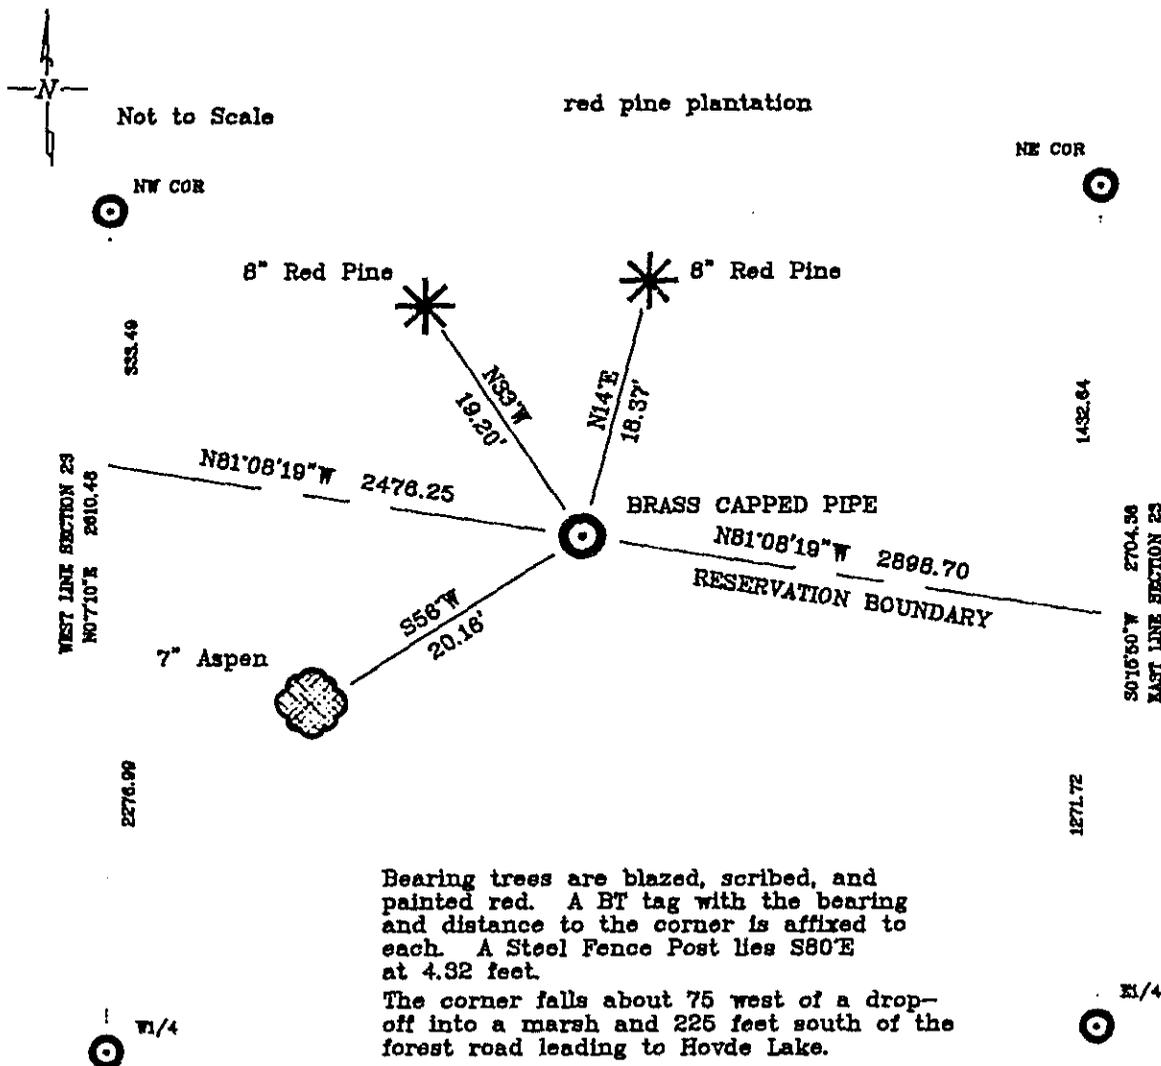

Bearing trees are blazed, scribed, and painted red. A BT tag with the bearing and distance to the corner is affixed to each. A Steel Fence Post lies S80°E at 4.32 feet.

The corner falls about 75 west of a drop-off into a marsh and 225 feet south of the forest road leading to Hovde Lake.

Statement of evidence relative to this corner location is on the back of this page 326 706

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

LaVerne Leuelling 1-21-91
LaVerne Leuelling Date

Registered Land Surveyor No. 18089
NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 1:50 P.M. Date: 2/14/91
Recorder Clouaine Kayler
By ms Deputy
DOCUMENT NO. 326 706

Statement of Evidence

December 1873: P.H.Conger set a post for Mile Post 15 31.50 chains after leaving a marsh. His bearing trees were:

18" White Pine	8" Oak
N10°E	S65°W
38 Links (25.08')	61 Links (40.26')

September 1873: P.H.Conger determined that the east line of section 23 crossed the reservation boundary at a point 18.81 chains north of the E1/4 corner and the west line crossed the reservation boundary at a point 34.89 chains north of the W1/4 corner.

October 5, 1890: Northern Lights Surveying & Mapping searched for the Mile Post, but found that the search area fell within a rock raked red pine plantation. We therefore set the corner at the "lost" position and established the following references:

8" Red Pine	8" Red Pine	7" Aspen	Steel Sign Post
N33°W	N14°E	S56°W	S80°E
19.20'	18.37'	20.16	4.32'