


### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner, Section 4, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September 23, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) set an aluminum capped, aluminum rod in place of a 1" iron pipe at the section corner as a perpetuation of the original General Land Office (G.L.O.) position based on Civilian Conservation Corps (C.C.C.) notes and other findings.

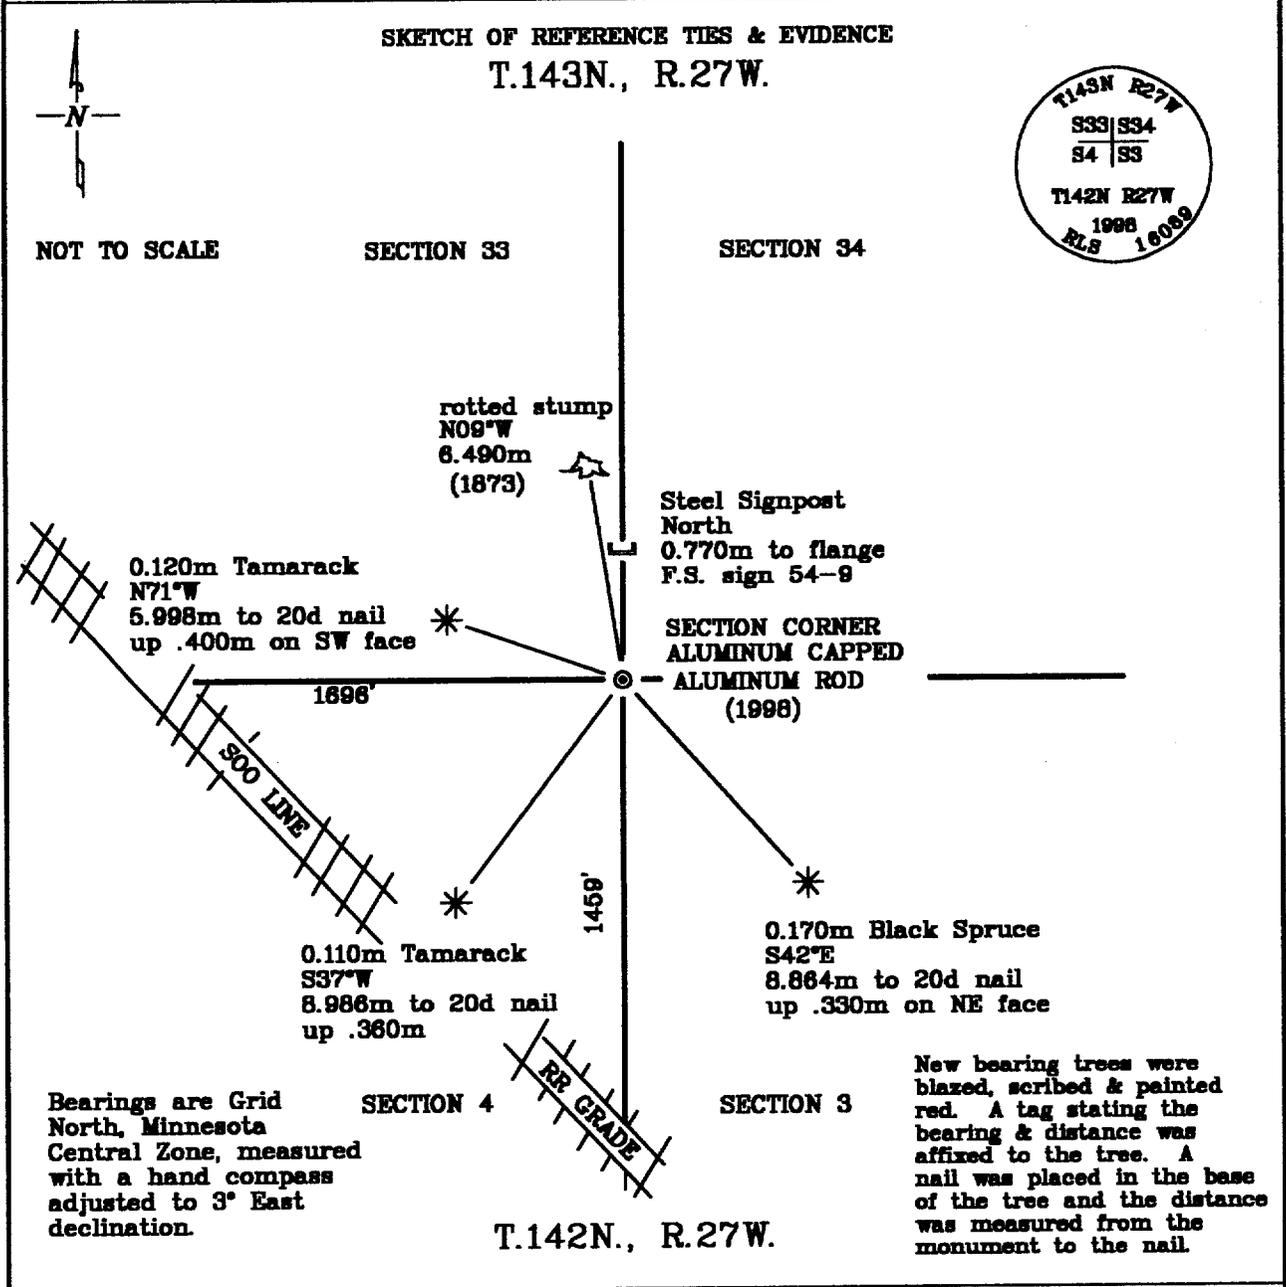

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*LaVerne Leuelling*  
 LaVerne Leuelling  
 Date: 4-24-1999  
 Licensed Land Surveyor No. 16089  
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412251  
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:25 P.M. Date: 4-29-99  
 Recorder Claudine Kaylor  
 By K.F. Deputy  
 DOCUMENT NO. 412251

## Statement of Evidence

Page 2 of 2

Northeast Corner, Section 4, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873; General Land Office, Deputy Surveyor P.H. Conger set a wood post for the section corner and referenced it with the following:

5"(0.127m) Spruce S47°E 35 Links (7.041m)	5"(0.127m) Spruce S22°W 23 Links (4.827m)	6"(0.152m) Spruce N55°E 38 Links (7.844m)
8"(0.203m) Spruce N09°W 36 Links (7.242m)		

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

April 3, 1903; R.C. Smith of the Corps of Engineers Book 355, p.60, notes that two 8" Tamaracks and one 5" spruce were found, all trees were alive with plain visible marks.

September 1928; Railroad Company makes reference from Soo Line to section corner with a distance of 1696' from the tracks intersection with the north line of section 4, and a distance of 1459' from the tracks' intersection with the east line of section 4 to corner.

October 24, 1940; Civilian Conservation Corps notes, form 874, states that R.T. DeFant found a rotted post level with the ground, he also found the following references:

10"(.254m) Tamarack N09°W 36 Links (7.242m)	8"(.203m) Tamarack N55°E 38 Links (7.844m)	Both scribed as original BT's
---	--	-------------------------------

DeFant placed a Forest Service Location Poster on the northeast side of a 4" Spruce.. The corner bears N45°E 8 links (1.609m) from the location poster. A pipe was placed at the corner and trees were blazed N-E-S-W of corner.

May 13, 1970; Curt Krause of the United States Department of Agriculture-Forest Service, chained south from the quarter corner and found a 1" diameter x 24" long steel pipe at the location of the section corner. There was also a squared 1"x 1" stake with a point and a F.S. location Poster on a 5"(0.127m) Spruce 1.815m southwest of the pipe.

September 23, 1998; Northern Lights Surveying and Mapping, Inc., crew of Foster and Brunner returned to the corner search position which was calculated from Curt Krause's cruise position from 1969. NLSM found the C.C.C. iron pipe and point of the old wood post in good condition. They remonumented this position with a 4.572m long 0.019m diameter aluminum rod with a 0.083m diameter aluminum stamped cap. The monument stands 0.330m above ground, and the following references were established:

0.170m Black Spruce S42°E 8.864m to 20d nail up .330m on NE face	0.110m Tamarack S37°W 8.986m to 20d nail up .360m	0.120m Tamarack N71°W 5.998m to 20d nail up .400m on SW face
Steel Signpost North 0.770m to flange F.S. sign 54-9	Possible G.L.O. BT:	rotted stump N09°W 6.490m

The corner lay 519.3m (1703') east of the centerline of the Soo Line Railroad Grade.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p. 67.

## Coordinates:

Cass County North  
Northing = 69267.684 meters  
Easting = 161723.245 meters

State Plane Coordinate System  
Minnesota Central Zone  
NAD 83

Northing = 339,257.448 meters  
Easting = 811,850.628 meters

Latitude = 47°09'08".72862 North  
Longitude = 94°05'37".47910 West