

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE Corner of Section 11, Township 139N, Range 28W, 5th p.m., State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 12/08/2010 found a 2" Iron pipe below ice for corner
Date

left monument as found lowered monument removed monument (explain)
On _____ placed a _____
Date

SKETCH OF REFERENCE TIES

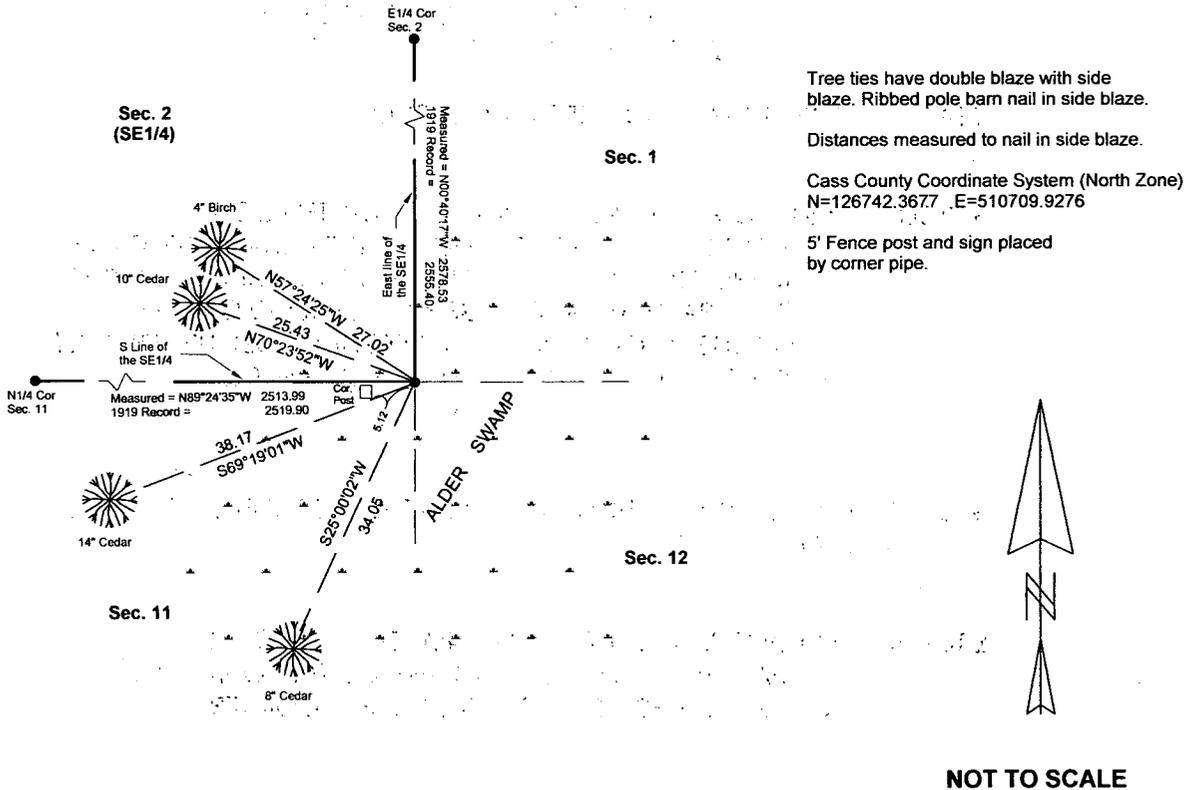

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 1/13/11
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

A000567747
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
01/31/2011 08:35:31 AM
AS DOC #: A000567747
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER



STATEMENT OF EVIDENCE:

NORTHEAST CORNER OF SECTION 11, TWP. 139 N., RGE. 28 W.

1864 APRIL DEPUTY SURVEYORS JOHNSON AND THORNTON IN THE ORIGINAL GOVERNMENT SURVEY SET A POST.

TIES: 6" CEDAR N 75 E 21 LINKS (13.86 FEET)
8" CEDAR N 10 W 30 LINKS (19.8 FEET)
9" CEDAR S 16 E 18 LINKS (11.88 FEET)
12" CEDAR S 80W 22 LINKS (14.52 FEET)

1914 TOWNSHIP ROAD ORDER (NO SURVEY)

1919 SEPT. BEN F. CLARK, LS #231, FOR A CONTRACTED COUNTY SUBDIVISION FILED IN THE OFFICE OF THE COUNTY RECORDER ON MARCH 3, 1922 AS DOC. NO. 69793. IN COUNTY SURVEYS BOOK C, PAGE 319 AND PAGE 321 CLARK INDICATED HE FOUND THE ORIGINAL BEARING TREES AND POST. HE REPLACED THE POST WITH A 3" x 30" IRON PIPE. NO NEW TIES.

1938 CIVILIAN CONSERVATION CORPS MEASURED 5017 FROM THE EAST AND FOUND THE PIPE.

2010 DEC. MARVIN R. KOHOUT, LS #17444 AND CREW FOUND A 2" DIAMETER IRON PIPE UNDER THE ICE. THE FOUND PIPE WAS ACCEPTED AS THE SOUTHEAST SEC. CORNER

DIRECTION AND DISTANCE TO:

FOUND EAST ¼ CORNER N 00-40-17 W 2578.53
FOUND SOUTH ¼ CORNER N 89-24-35 W 2513.99