



A000592107

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/2/2013 11:50:38 AM

AS DOC #: A000592107

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Page 1 of 2 A000592107

Index No. _____ J-11 _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER _____ Corner of Section 16 ,Township 134 ,Range 32


5TH Principal Meridian, State of Minnesota, County of _____ CASS

At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 5/16/11 Placed a 1" X 48" INSIDE DIAMETER IRON PIPE WITH CAP STAMPED
DATE
"MN DNR LS 47461" UP 0.5' IN THE CENTERLINE OF AN OLD NORTH-SOUTH ROAD BED

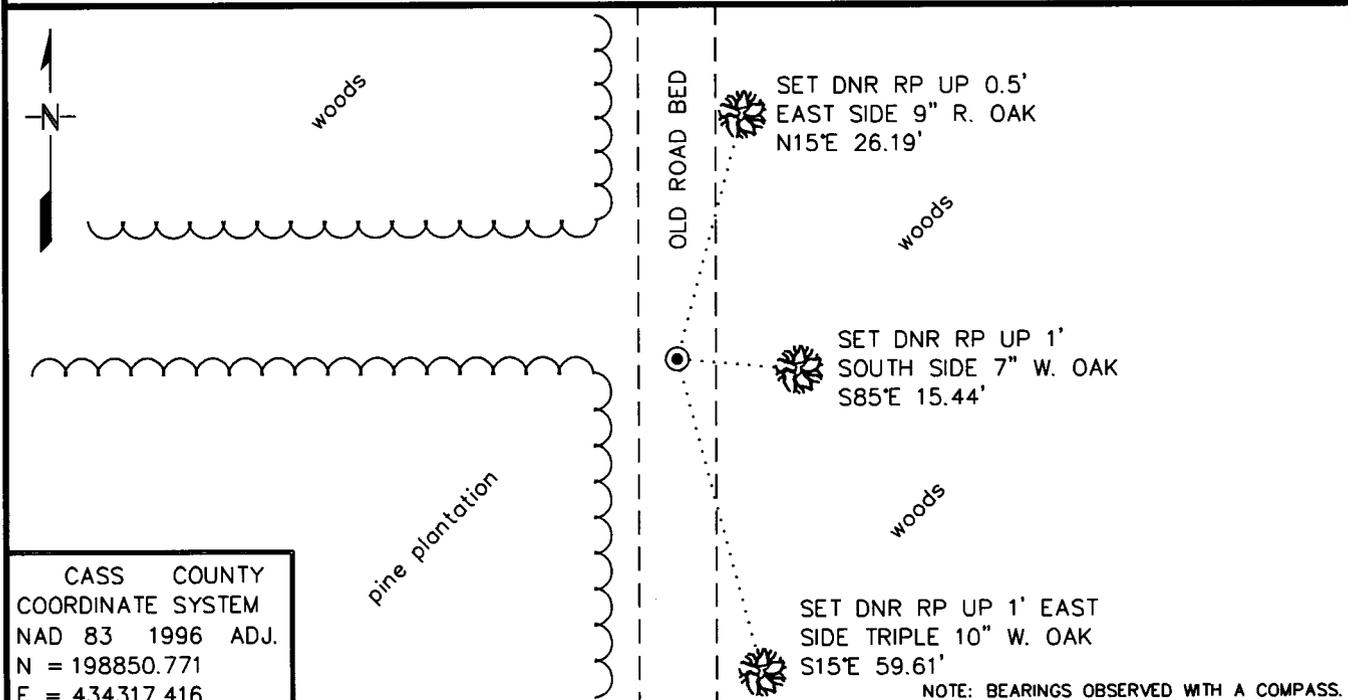

Statement of evidence for this corner location is on back of this page.

RAL - JUNE 2011
FOM01910.00.00.01

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE *K. Norby* DATE 4/24/13 License Number 47461
Title: Land Surveyor County Surveyor

STATEMENT OF EVIDENCE**North Quarter Corner of Section 16, Township 134 North, Range 32 West, 5th P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

Cass County Recorder
 Cass County Surveyor
 Cass County Highway Dept.
 Westwood Professional Services - Brainerd
 Carnell Land Surveying, LLC
 Arro of Park Rapids, LLC
 Nyberg Surveying
 Festler Land Surveying
 Kramer Leas Deleo, PC
 Widseth Smith Nolting - Baxter

1870 This corner was established by the Government Land Office. A post was set to mark the corner and was witnessed by the following bearing trees:

N. Pine	26"	S66°E	16 Links
B. Pine	12"	N84°W	48 Links

1939 Aerial photography of this area, on file with the Department of Natural Resources, shows a road along the north-south quarter lines of Sections 9, 16, 21 and 28.

2011 In May, the DNR survey crew made a search for evidence of the corner and located the centerline of an old north-south road bed. No other evidence of the corner was recovered. Using the centerline of the old road as evidence of the corner location, the corner was computed on line between the Northeast and Northwest corners of Section 16 and in the centerline of the old road bed. This position fell at the north edge of a pine plantation to the west. This position was accepted as the corner and a 1" x 48" inside diameter iron pipe with cap stamped "MN DNR LS 47461" was set to mark the corner location.

Northeast Corner Section 16 bears N89°37'07"E 2680.73'

Northwest Corner Section 16 bears S89°37'07"W 2704.93'

For more information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401

