



A000610416

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/26/2015 10:42:13 AM

AS DOC #: A000610416

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 121714

Page 1 of 2 A000610416

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Index No. G.0-9.0

EAST QUARTER of Section 08, Township 138 N., Range 29 W., 5th P.M.
State of Minnesota, County of Cass.


At the corner location shown on the sketch:

On 13 NOV 2013 found a 2" IRON PIPE, 36.5' West of centerline HWY 84.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES
NOT TO SCALE

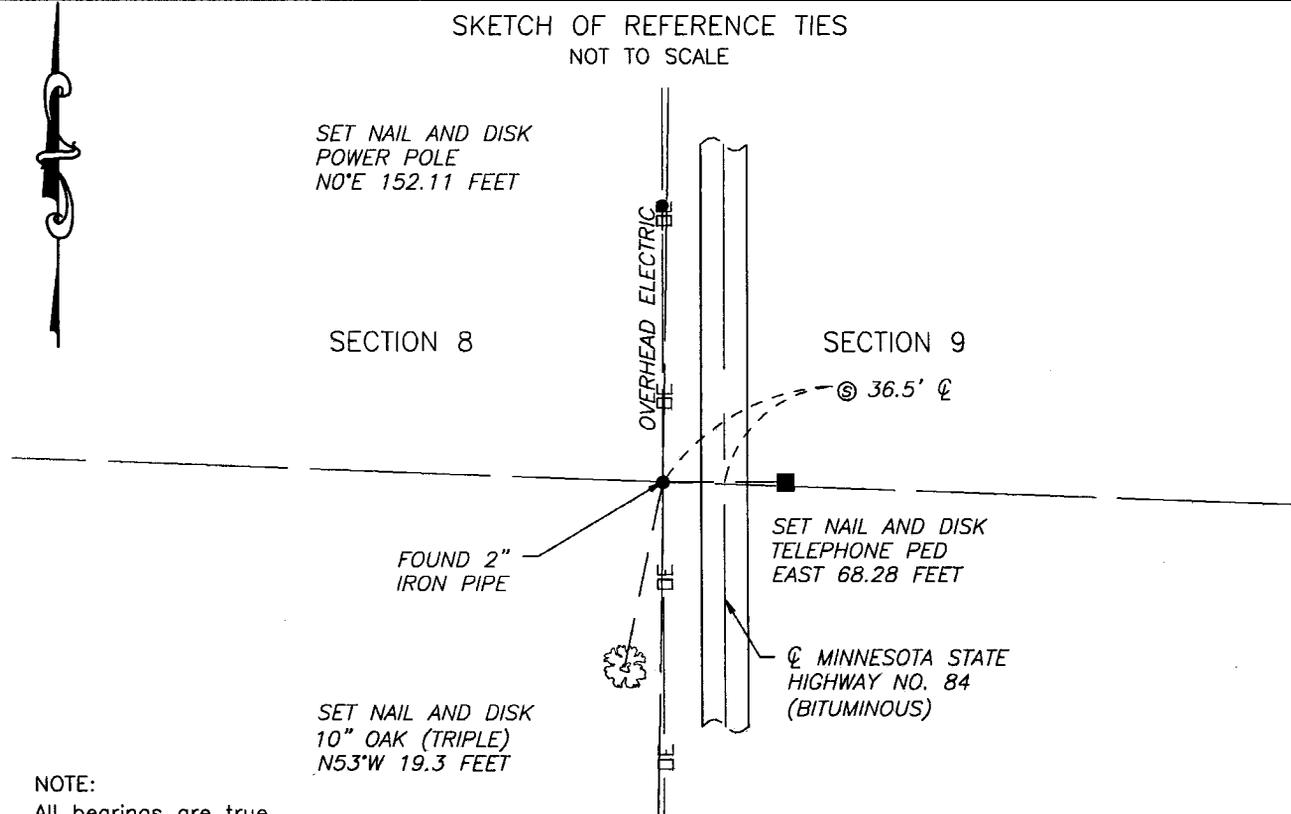

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.
I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen
Date 3/16/15 MN License No. 16459



Index No. G.0-09.0

Statement of Evidence

East Quarter corner of Section 8, Township 138 North, Range 29 West, 5th Principal Meridian.

July 22 T.B.Walker, General Land Office Deputy Surveyor in the subdivision of Township 138 North, Range 29
1865 West set a post for the original corner and referenced it as follows:
14" Wh Pine S 49° W 31 links (20.46 feet) 9" Oak N 86-1/2° E 165 links (108.90 feet)
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with Cass
County Highway Department/Surveyor's Office.

April A.W.Moulster, Cass County Deputy Surveyor, Curo Field Book 51, on file with Cass County Highway
5 & 6 Department/Surveyor's Office, page 19 is marked State Survey and lists the GLO witnesses with distances
1912 given in feet. Pages 20 and 21 state "Setting on cor. 4-5-8-9 run south 8°45' Var....2400....2600....2640 – in
east neck of point of swp....at 5307 – SE of 8 sets west 34.50 feet".

April A.W.Moulster, Cass County Deputy Surveyor, Ditch/Road Book S5-2, pages 10 & 11, on file with Cass
1912 County Highway Department/Surveyor's Office, Transit notes on S.R. #4, show at Station 26+40, "no trace
of ¼ cor."

Nov. Northwestern Surveying and Engineering, Inc. (NWSE), crew of Bomstad and Walker-O'Bierne recovered a
2013 2 inch iron pipe, 36 feet, more or less, westerly of the existing centerline of State Highway Number 84. The
monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument
recovered by NWSE is the accepted location of this corner.