



A000683301

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

4/12/2022 12:16:49 PM

AS DOC #: A000683301
 PAGES: 2
 REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER
 BY KF Dep TX#: 180547


Index No. L-21

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 14, Township 142, Range 29
5th Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On 2/2/2021 found a NOTHING (WAS NEVER SET IN 1918 GLO RESURVEY)
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 2/17/2021 Placed a 3/4" X 6" REBAR WITH CAP STAMPED "MN DNR LS 48249"
DATE
WELDED TO A 6' "T" STEEL POST, UP 1.5', IN AN OPEN BOG.

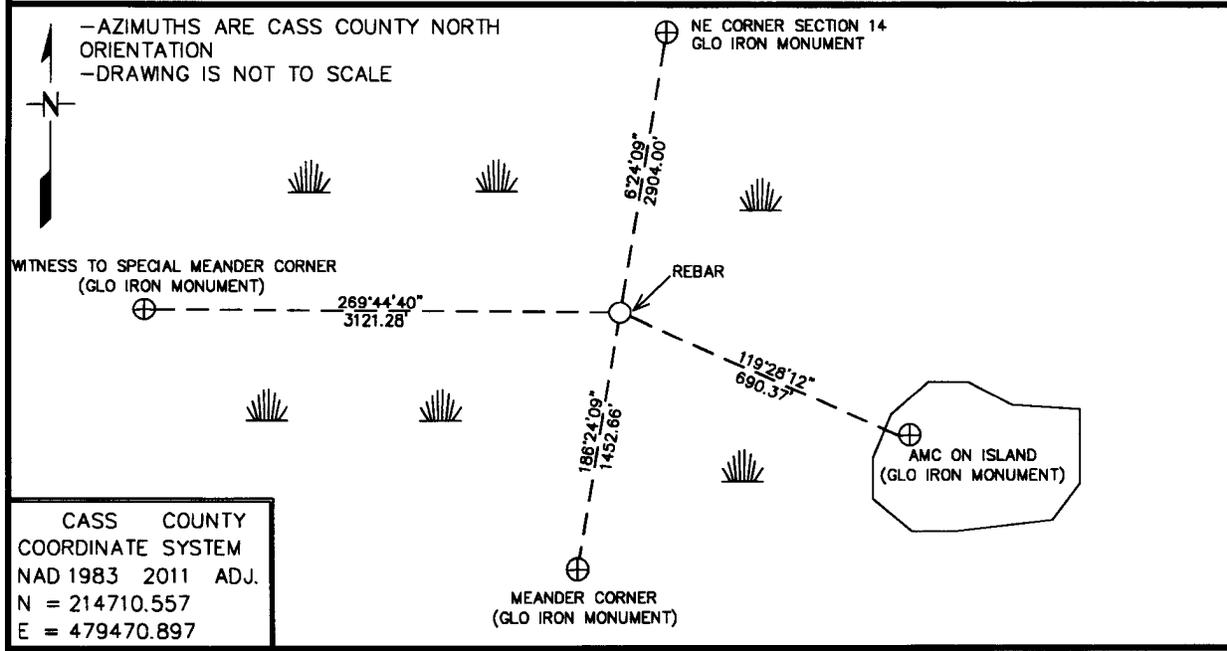

CASS COUNTY
 COORDINATE SYSTEM
 NAD 1983 2011 ADJ.
 N = 214710.557
 E = 479470.897

Statement of evidence for this corner location is on back of this page. AMD 4/15/2021
AMA00296.00.00.01

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

SIGNATURE Daniel A. Drusch DATE 2-16-2022 License Number 48249
 DANIEL A. DRUSCH

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

**East Quarter Corner Section 14, Township 142 North, Range 29 West, 5th P.M.**

The DNR Land Survey Unit contacted the following offices for survey information on this corner:

MN Secretary of State
Cass County Recorder and Surveyor
NECI Land Surveying

1918 The U.S. General Land Office (GLO) field notes, on file in the MN Secretary of State's Office, describe this corner as being in a bog and not set.

1969 Air photos on file with the DNR show this corner to be in a large boggy area.

2021 February, the DNR Land Survey Unit conducted a search for this corner but did not find any original evidence as corner was never set. As a result the corner was computed by Proportionate Measurement between the found Southeast corner of Lot 3 and the found Northeast corner of Section 14. A 6-foot 'T' steel fence post with a 3/4" rebar welded to the top and a RLS cap #48249 placed on top was set in the bog at this computed position. This computed position was found to measure:

2904.00 feet (GLO = 2909.28 feet) to the Northeast corner section 14.

1452.66 feet (GLO = 1455.3 feet) to the Southeast corner Lot 3, Section 14.

Analysis of the available information led me to accept the computed position as the corner. Lack of government perpetuation bears out the need for the lost position.